

Floor Light Square

Floor Light Louvre Square

FLSPSQ

FLLUSQ

DESCRIPTION

The Floor Light Square is an uplighter luminaire which has a low profile of 7mm. The square shape makes it ideal for mounting in tiled areas and it can be walked upon without being damaged. There are 2 flange designs: Louvre (45 degrees angle) and Spot. All Floor Lights are supplied with a mounting canister.



PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 Lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees


*Specification for pureled only, for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES	
Materials	Solid Copper or 316 Stainless Steel
Ingress Protection	IP67
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE


POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***	
NO DRIVER REQ FOR GU10	

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

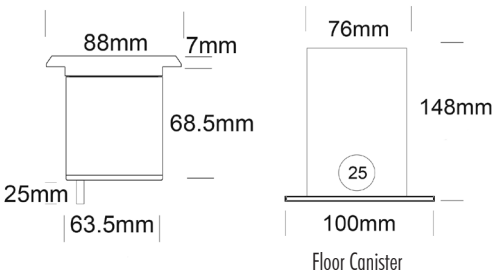

CATEGORY
RECESSED & INGROUND

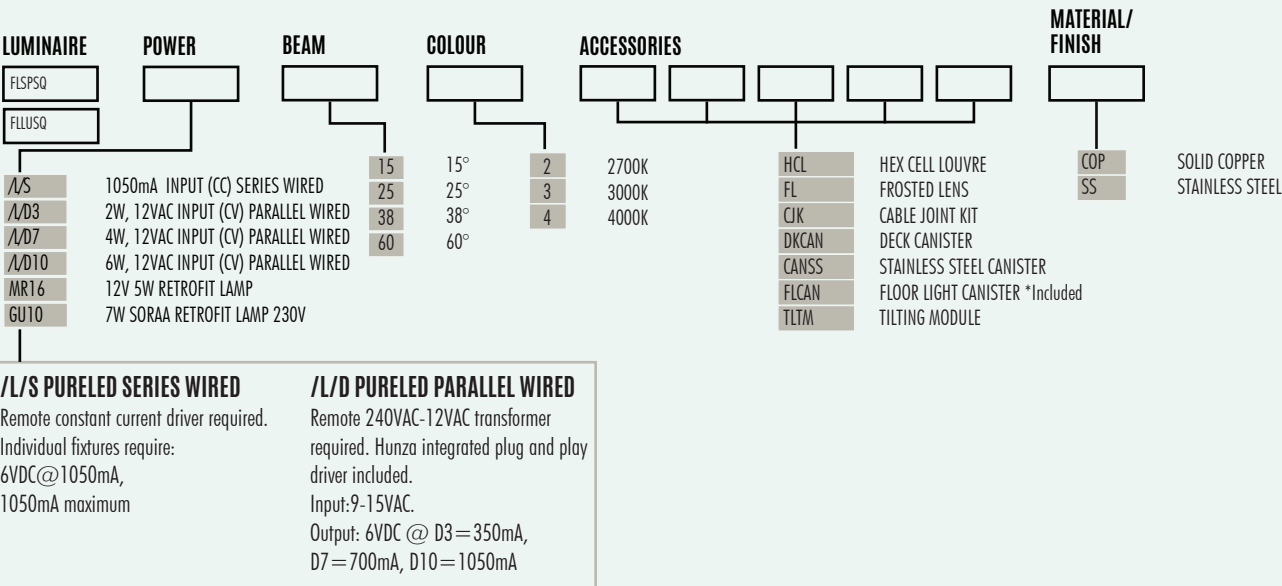

/L/S PURELED SERIES WIRED

Remote constant current driver required.

Individual fixtures require:

6VDC@1050mA,

1050mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240VAC-12VAC transformer required. Hunza integrated plug and play driver included.

Input:9-15VAC.

Output: 6VDC @ D3=350mA,

D7=700mA, D10=1050mA

PRODUCT CONFIGURATION