

ST150

ST150/U

DESCRIPTION

The SafeTouch150 inground uplighter has been specifically designed with public safety as its primary objective. It produces high-output optically pure light, but operates with cool lens temperatures, low energy consumption and minimal maintenance. It has a fully adjustable eyeball mechanism allowing 360 rotation and 0-20 elevation. This luminaire is extremely tough, durable and water-proof, making it ideal for installation in public spaces, large-scale projects and residential areas.

A Direct Burial option is available without the mounting canister, for installation directly in the soil or where there is limited depth.





PURE LED	
LED Chip	Cree CXA 2540 Plug and Play field replaceable LED boards, 37Vf
Output	5000 lumens @ 1400mA max
Lumens Per Watt	90 lm/W
Power Consumption	52 watts
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	80 standard, 90+ optional
Beam Angle	22, 33, 51 Degrees


PHYSICAL PROPERTIES	
Materials	Solid Bronze or 316 Stainless Steel flange, Powdercoated Aluminium body
Ingress Protection	IP67
Impact Resistance	IK10
Standards	BS/EN 60598.2.2, UL1598, CE

POWER SUPPLY OPTIONS	
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) DRIVER REQ FOR SERIES WIRED (CC FORMAT) **	

** Contact sales office



CATEGORY
ARCHITECTURAL ULTRA RANGE

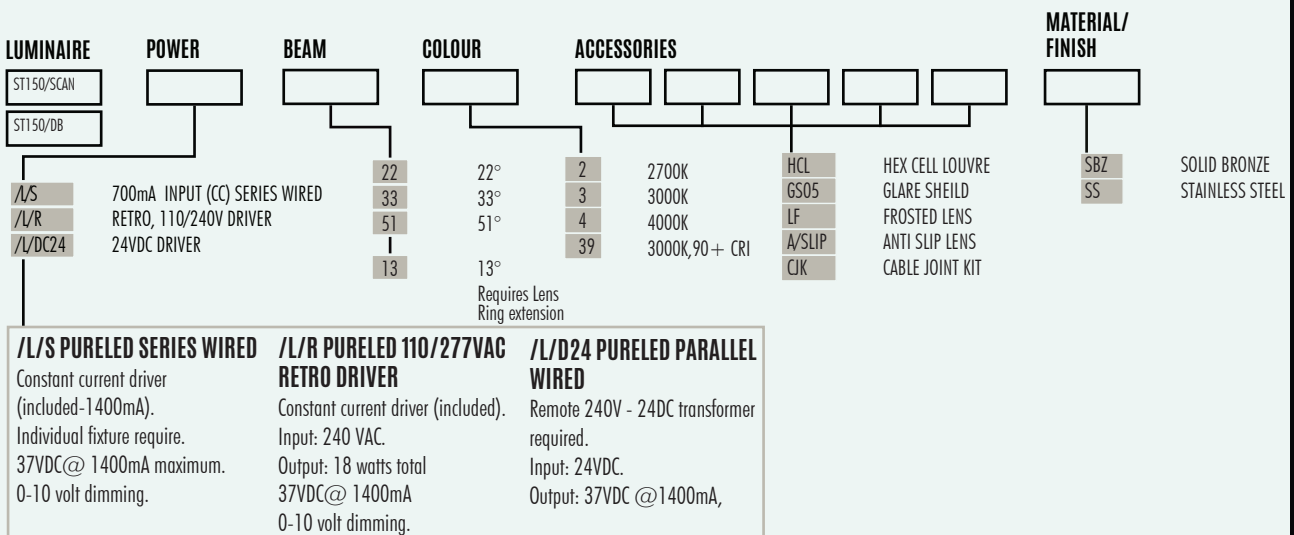

PRODUCT CONFIGURATION