


Twin Pole Light

TPL

DESCRIPTION

The Twin Pole Light is ideal for path lighting as well as tree lighting, or the heads may be aimed downward to eliminate vertical light. The fixture has two individual spotlights which can be aimed in two entirely different directions. Each lite has fully adjustable arms allowing 360 degree rotation and 0 - 90 degree elevation.

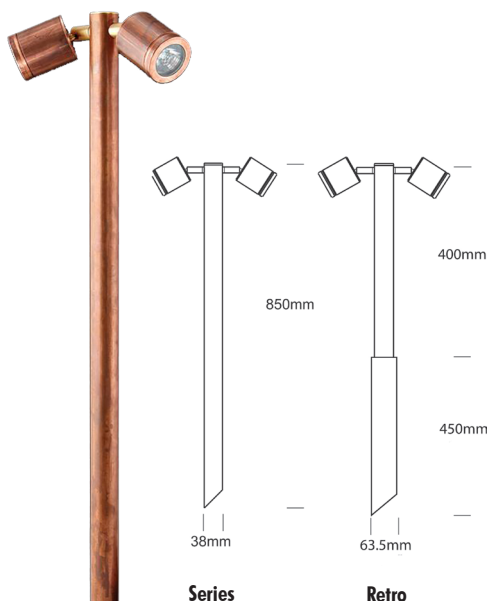

CATEGORY
POLE MOUNTED

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	2x600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	12 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only for retrofit lamp options please see alternative page.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	AS/NZS 61046, UL 1838, CSA C22.2 No. 250.7

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES	MATERIAL/ FINISH
TPL					
/S	1050mA INPUT (CC) SERIES WIRED	15	15°	2 2700K	ALUMINIUM BK BLACK BZ BRONZE OGR OLIVE GREEN WH WHITE WB WHITE BIRCH DG DARK GREY STAR SILVER STAR CT CORTEN COP SOLID COPPER SS STAINLESS STEEL
/D3	2x2W, 12VAC INPUT (CV) PARALLEL WIRED	25	25°	3 3000K	
/D7	2x4W, 12VAC INPUT (CV) PARALLEL WIRED	38	38°	4 4000K	
/D10	2x6W, 12VAC INPUT (CV) PARALLEL WIRED	60	60°	39 3000K,90+ CRI	
/L/R	2x4W, RETRO, 110/240V DRIVER			HCL HEX CELL LOUVRE SNT SNOOT GG GLARE GUARD FL FROSTED LENS FM FLANGE MOUNT LKN LOCKING KNUCKLE CJK CABLE JOINT KIT	
MR16	2x5W RETROFIT LAMP 12V				
MR16/R	2x5W RETROFIT LAMP with integral 230V Input Driver				
GU10	2x7W SORAA RETROFIT LAMP 230V* * Use with flange mount only				
/L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 6VDC@1050mA, 1050mA maximum		/L/D PURELED PARALLEL WIRED Remote 240VAC - 12V AC transformer required. Hunza integrated plug and driver included. Input: 9-15VAC. Output: 6VDC @ D3 = 350mA, D7 = 700mA, D10 = 1050mA		/L/R PURELED 110/240VAC RETRO DRIVER Input: 110/240VAC, 12 Watt max (included) Output: 1-18VDC, 700mA	

PRODUCT CONFIGURATION