

Path Light Surface Mount

DESCRIPTION

The Path Light Surface Mount is ideal for lighting flat areas where a recessed fitting is not suitable. It is especially suited to decks, paved courtyards and edge lighting paths. The custom made TIR Borosilica glass lens has been developed to prevent dirt, mud, grass clippings or water from entering the optics area, keeping with its IP66 rating. The TIR throws lights downwards and across the horizontal surface.

PLSM

PURE LED

LED Chip	Cree XPG-3 Plug and Play, field replaceable PCB board, 3Vf
Output	120 lumens @ 700mA max
Lumens Per Watt	60 lm/W
Power Consumption	2 Watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	90, 90 x 90, 180, 270, 360 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

Materials	Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	As/NZS 61046, UL1838, 2108

POWER SUPPLY OPTIONS



DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***

** See pages 2,7,9 power supplies

*** See pages 11-12 power supplies



88mm

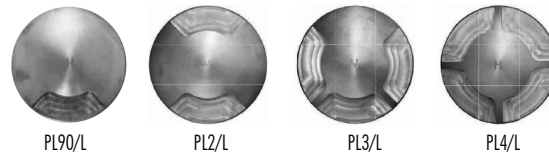

CATEGORY
RECESSED & INGROUND

LUMINAIRE

PLSM1	
PLSM2	PLSM4
PLSM3	PLSM90

POWER

/L/S	700mA INPUT (CC) SERIES WIRED
/L/B3	1W, 12VAC INPUT (CV) PARALLEL WIRED
/L/B7	2W, 12VAC INPUT (CV) PARALLEL WIRED

COLOUR

2	2700K
3	3000K
4	4000K

ACCESSORIES

CJK	CABLE JOINT KIT
-----	-----------------

MATERIAL/ FINISH

COP	SOLID COPPER
SS	STAINLESS STEEL

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
3VDC@350mA,
700mA maximum

/L/B PURELED PARALLEL WIRED

Remote 240VAC - 8-24VAC transformer required.
BuckBullet driver on flex included.
Output: 3VDC @ D3=350mA,
D7=700mA

PRODUCT CONFIGURATION