

Pagoda Light

PGL

DESCRIPTION

The Pagoda Light fixture provides non-directional lighting, ideal for illumination of areas such as porches or entrance ways. The lens reflects light at two angles, horizontally and downwards, to illuminate surrounding landscape.



PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	510 lumens @ 1050mA max
Lumens Per Watt	85lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	360 degrees

*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES


Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, EN60598, UL 1838, 2108, 1598, CSA C22.2 No. 250.7, 250.0-08, 250.0, CE

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

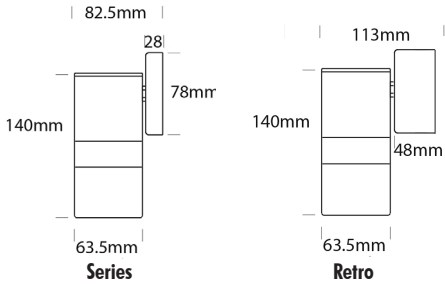

CATEGORY
WALL MOUNT

LUMINAIRE

PGL

POWER

- /L/S 1050mA INPUT (CC) SERIES WIRED
- /L/D3 2W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D7 4W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D10 6W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/R 4W, RETRO, 110/240V DRIVER
- MR16 12V 5W RETROFIT LAMP
- MR16/R 5W RETROFIT LAMP with integral 230V Driver
- GU10 7W SORAA RETROFIT LAMP 230V

BEAM

360

COLOUR

360°

ACCESSORIES

- 2
- 3
- 4

2700K
3000K
4000K

BOLOP
C/JK

OPAQUE LENS
CABLE JOINT KIT

MATERIAL/ FINISH

- BK
- BZ
- OGR
- WH
- WB
- DG
- STAR
- CT
- COP
- SS

BLACK
BRONZE
OLIVE GREEN
WHITE
WHITE BIRCH
DARK GREY
SILVER STAR
CORTEN
SOLID COPPER
STAINLESS STEEL

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
6VDC@1050mA,
1050mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240VAC - 12VAC transformer required. Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA, D10=1050mA

/L/R PURELED 110/240VAC RETRO DRIVER

Remote 240VAC - 12VAC transformer required. Hunza integrated plug and play driver included.
Input: 110/240VAC, 12 Watt max (included)
Output: 1-18VDC, 700mA

PRODUCT CONFIGURATION