

# Wall Spot High Power

WS/HP

## DESCRIPTION

The Wall Spot High Power has been designed to be mounted on walls and provide directional light for pathways and structural elements of a building. This luminaire has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation. All Hunza High Power products have an extra powdercoat layer to ensure maximum corrosion protection.

PURE LED	
LED Chip	Cree CXA1512 Plug and Play, field replaceable PCB boards, 18Vf
Output	1200 lumens @ 700mA max
Lumens Per Watt	100lm/W
Power Consumption	12.6 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	85+, 90+ (optional)
Beam Angle	15, 25, 38, 60 degrees

\*Specification for pureled only, there are no other alternative lamp sources for this fixture.

## PHYSICAL PROPERTIES


Materials	Powdercoated Aluminium
Ingress Protection	IP66
Standards	AS/NZS 61046, UL 1598, CSA C22.2 No. 250.0

## POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) \*\* | DRIVER REQ FOR PARALLEL WIRED ( CV FORMAT )\*\*\*  
NO DRIVER REQ FOR RETRO 'R' ( INTEGRAL 230V IN )

\*\* See pages 2,6-7,9 power supplies

\*\*\* See pages 10 power supplies

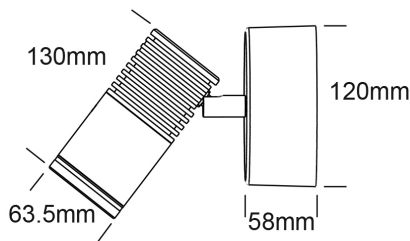

Retro

CATEGORY  
WALL MOUNT

### LUMINAIRE

WS/HP

### POWER

- /L/S 700mA INPUT (CC SERIES WIRED)
- /L/D7 12W, 24VDC INPUT (CV PARALLEL WIRED)
- /L/R RETRO, 110/240V DRIVER

### BEAM

### COLOUR

- 15
- 30
- 40

### ACCESSORIES

- 2 2700K
- 3 3000K
- 4 4000K
- 39 3000K,90+ CRI

- LKN LOCKING KNUCKLE
- HCL HEX CELL LOUVRE
- SNT SNOOT
- GG GLARE GUARD
- FL FROSTED LENS
- CKK CABLE JOINT KIT

### MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN

### /L/S PURELED SERIES WIRED,

Remote constant current driver required.  
Individual fixtures require:  
18Vf@700mA

### /L/D PURELED PARALLEL WIRED,

Remote 240VAC - 24VDC supply required. Hunza integrated plug and play driver included.  
Input: 20-32VDC.  
Output: 18Vf @ 700mA

### /L/R PURELED 110/240VAC RETRO DRIVER

Input: 110-240VAC, 14 watt total (driver included)  
Output: 18Vf, 700mA  
0-10 volt dimming

ALUMINIUM

PRODUCT CONFIGURATION