


Cube Pole Spot

CPS

DESCRIPTION

The Cube Pole Spot is ideal for path lighting or tree lighting. These innovative fittings have an adjustable head that tilts through 180 degrees and features the Cube range style of a simple yet bold design flair.

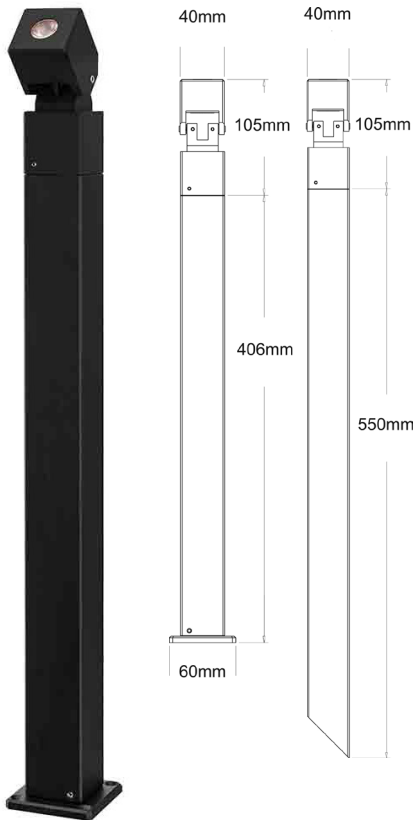

PURE LED	
LED Chip	Cree XPG-3 Plug and Play, field replaceable PCB board, 3Vf
Output	200 Lumens @ 1050mA max
Lumens Per Watt	67lm/W
Power Consumption	3.15 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 45 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium
Ingress Protection	IP66
Standards	AS/NZS 61046, UL1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***	

** See pages 2,6-9 power supplies

*** See pages 11-12 power supplies

CATEGORY
POLE MOUNTED

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES	MATERIAL/ FINISH
CPS					
/A/S	1050mA INPUT (CC) SERIES WIRED	15	15°	2	BK
/L/B3	1W, 12VAC INPUT (CV) PARALLEL WIRED	25	25°	3	BZ
/L/B7	2W, 12VAC INPUT (CV) PARALLEL WIRED	45	45°	4	OGR
				A	WH
				B	WB
				R	DG
					CT
/L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 3VDC@1050mA, 1050mA maximum		/L/B PURELED PARALLEL WIRED Remote 240V to 8-24VAC transformer required. Buck Bullet Driver on Flex. Input: 8-24VAC. Output: 3VDC @ B3 = 350mA, B7 = 700mA		2700K 3000K 4000K AMBER BLUE RED	CJK FM CABLE JOINT KIT FLANGE MOUNT

PRODUCT CONFIGURATION