

Step Light Solid Eyelid

SLS

DESCRIPTION

The Step Light Solid Eyelid is designed with a smooth fixing free 88mm flange and recessed body for flush mounting into masonry, stone or wood, providing illumination of steps and low level features such as exterior paved areas. The Eyelid feature eliminates all upward light, providing an excellent glare-free illuminating effect. The Step light Canister for installation is included with the fitting.

Alternatively, screw holes in the flange are available when requested. This alternative mounting can be used when direct fix mounting into wooden decking.



PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees


*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	As/NZS 61046, UL1838, CSA C22.2 No. 250.7

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***	
NO DRIVER REQ FOR GU10	

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

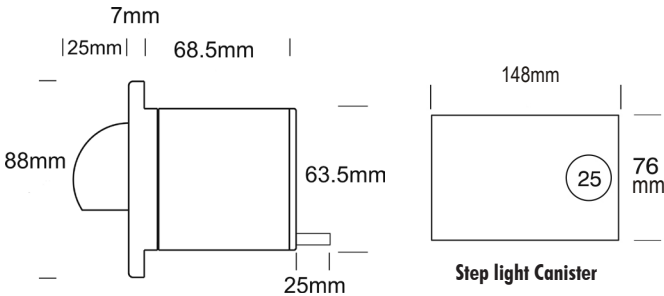

CATEGORY
STEP

LUMINAIRE

SLS

POWER

1050mA INPUT (CC) SERIES WIRED

2W, 12VAC INPUT (CV) PARALLEL WIRED

4W, 12VAC INPUT (CV) PARALLEL WIRED

6W, 12VAC INPUT (CV) PARALLEL WIRED

12V 5W RETROFIT LAMP

7W SORAA RETROFIT LAMP 230V

BEAM

15

25

38

60

COLOUR

15°

25°

38°

60°

ACCESSORIES

2

3

4

2700K

3000K

4000K

HCL

FL

CJK

TLTM

DKCAN

SILCAN

CANSS

HEX CELL LOUVRE

FROSTED LENS

CABLE JOINT KIT

TILTING MODULE

DECK CANISTER

STEP LIGHT CANISTER *Included

STAINLESS STEEL CANISTER

MATERIAL/
FINISH

BK

BZ

OGR

WH

WB

DG

STAR

CT

COP

SS

BLACK

BRONZE

OLIVE GREEN

WHITE

WHITE BIRCH

DARK GREY

SILVER STAR

CORTEN

SOLID COPPER

STAINLESS STEEL

/L/S PURELED SERIES WIRED

Remote constant current driver required.

Individual fixtures require:

6VDC@1050mA,

1050mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240VAC - 12V AC transformer required.

Hunza integrated plug and play driver included.

Input: 9-15VAC.

Output: 6VDC @ D3=350mA,

D7=700mA, D10=1050mA

PRODUCT CONFIGURATION