

Down Light ULTRA

DL/U

DESCRIPTION

The Ultra Down Light has been designed to be mounted on vertical surfaces. It has a fixed head that can be directed downwards or upwards to give a dramatic wash lighting effect.

All Hunza products have an extra layer of powdercoat to ensure maximum corrosion protection.




PURE LED	
LED Chip	Cree CXA Plug and Play, field replaceable PCB boards, 37Vf
Output	5000 lumens @ 1400mA max
Lumens Per Watt	80 lm/W
Power Consumption	52 watts
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	85+
Beam Angle	13, 22, 33, 51 Degrees

PHYSICAL PROPERTIES	
Materials	Powdercoated Aluminium
Ingress Protection	IP66
Impact Resistance	IK10
Standards	BS/EN 60598.2.2, UL1598, CE

POWER SUPPLY OPTIONS	
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) DRIVER REQ FOR SERIES WIRED (CC FORMAT) **	

** Contact sales office

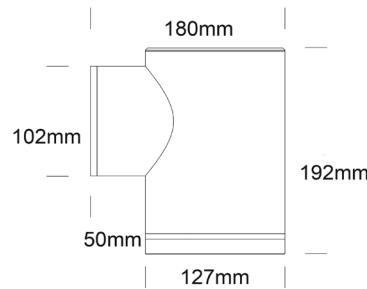

CATEGORY
ARCHITECTURAL ULTRA RANGE

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES	MATERIAL/ FINISH	
DL/U						
/L/S	1400mA INPUT (CC) SERIES WIRED	22	22°	2	HCL	BK
/L/R	RETRO, 110/240V DRIVER	33	33°	3	SNT	BZ
		51	51°	4	GG	OGR
		13	13°	39	GSO5	WH
			Requires Lens Ring extension		FL	WB
					CHK	DG
						STAR
						CT

/L/S PURELED SERIES WIRED
Constant current driver (included-1400mA). Individual fixture require 37VDC @ 1400mA maximum. 0-10 volt dimming.

/L/R PURELED 110/277VAC RETRO DRIVER
Constant current driver (included). Input: 240 VAC. Output: 60 watts total 37VDC @ 1400mA 0-10 volt dimming.

HEX CELL LOUVRE
SNOOT
GLARE GUARD
GLARE SHIELD
FROSTED LENS
CABLE JOINT KIT

ALUMINIUM

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN