

Flush Washer

WASHF

DESCRIPTION

The Flush Washer Light has a flush profile, perfect for pedestrian areas. It can be walked on without damaging the luminaire. Utilising an asymmetric optic, it directs the light towards the desired surface with little to no glare. Supplied with a mounting canister

PURE LED

LED Chip	Cree CXA 1304 Plug and Play, field replaceable
Output	400 Lumens @ 700mA max
Lumens Per Watt	66lm/W
Power Consumption	6 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	85+ standard, 90+ optional
Beam Angle	Asymmetric

*Specification for pureled only, there are no other alternative lamp sources for this fixture

PHYSICAL PROPERTIES

Materials	Solid Bronze or 316 Stainless Steel Flange, Powdercoated Aluminium Body
Ingress Protection	IP68
Impact Resistance	IK10
Standards	BS/EN 60598.2.2, 60598.2.18, 60598.1. cUL 1838, 2108. CE



POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
RECESSED & INGROUND

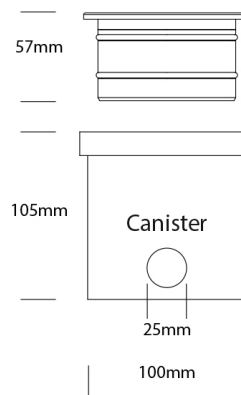

PRODUCT CONFIGURATION

LUMINAIRE

WASHF

POWER

- /L/S 700mA INPUT (CC) SERIES WIRED
- /L/D3 3W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D7 6W, 12VAC INPUT (CV) PARALLEL WIRED

/L/S PURELED SERIES WIRED

Remote constant current driver required. Individual fixtures require: 9VDC@1050mA, 1050mA maximum

BEAM

AS

COLOUR

Asymmetric

ACCESSORIES

- 2 2700K
- 3 3000K
- 4 4000K
- 39 3000K,90+ CRI

CIK

CGS

CABLE JOINT KIT
CUSTOM GLARE
SHIELD

MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN
- ALUMINIUM
- COP SOLID COPPER
- SS STAINLESS STEEL