

Cube Pillar Light

CPIL/L

DESCRIPTION

The Cube Pillar Light is designed to be wall mounted for multiple lighting applications. It illuminates both up-wards and downwards, giving columns, gateway pillars and entrances a dramatic effect.

PURE LED

LED Chip	Cree XHP-3 Plug and Play, field replaceable LED board, 2x3Vf
Output	2x120 lumens @ 700mA max
Lumens Per Watt	60lm/W
Power Consumption	6.3 watts @1050mA (Ali only), 4.2 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 45 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES


Materials	Powdercoated Aluminium or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL 1838, 2108, 1598, CSA 22.2 No. 250.7, 250.0-08, 250.0, CE

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) **

** See pages 2,6-9 power supplies

CATEGORY
WALL MOUNT

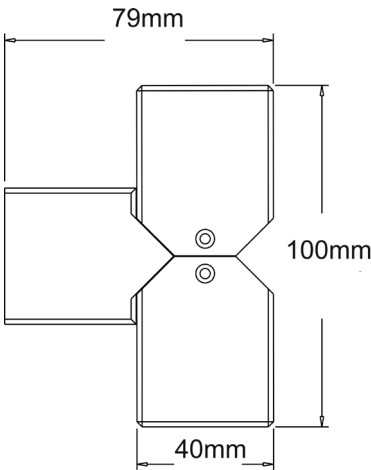

PRODUCT CONFIGURATION

LUMINAIRE	POWER	BEAM	COLOUR	ACCESSORIES					MATERIAL/ FINISH
CPIL									
/L/S	700mA INPUT (CC) SERIES WIRED		15 25 45	15° 25° 45°	2 3 4 A B G R	2700K 3000K 4000K AMBER BLUE GREEN RED	CIK	CABLE JOINT KIT	BK BZ OGR WH WB DG STAR CT SS
<p>/L/S PURELED SERIES WIRED, Remote constant current driver required. Individual fixtures require: 3VDC@700mA</p>									BLACK BRONZE OLIVE GREEN WHITE WHITE BIRCH DARK GREY SILVER STAR CORTEN STAINLESS STEEL