

Washer

WASH

DESCRIPTION

The Washer can be walked on without damaging the luminaire. Utilising an asymmetric optic, it directs the light towards the desired surface with little to no glare.

PURE LED

LED Chip	Cree CXA 1304 Plug and Play, field replaceable
Output	400 Lumens @ 700mA max
Lumens Per Watt	66lm/W
Power Consumption	6 watts @700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	85+ standard, 90+ optional
Beam Angle	Asymmetric

*Specification for pureled only, there are no other alternative lamp sources for this fixture

PHYSICAL PROPERTIES


Materials	Solid Bronze or 316 Stainless Steel Flange, Powdercoated Aluminium Body
Ingress Protection	IP68
Impact Resistance	IK 10
Standards	BS/EN 60598.2.2, 60598.2.18, 60598.1. cUL 1838, 2108. CE

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT) ***

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

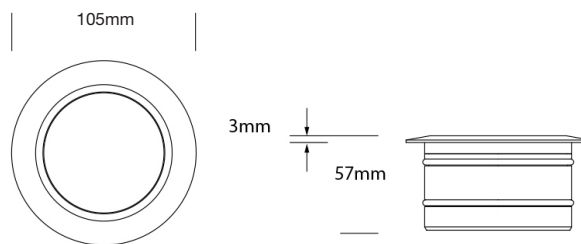

CATEGORY
RECESSED & INGROUND

LUMINAIRE

WASH

- /L/S
- /L/D3
- /L/D7

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
9VDC@700mA,
700mA maximum

POWER

- 700mA INPUT (CC) SERIES WIRED
- 3W, 12VAC INPUT (CV) PARALLEL WIRED
- 6W, 12VAC INPUT (CV) PARALLEL WIRED

BEAM

AS

12VAC INTEGRAL DRIVER

Hunza integrated plug and play driver
Input:9-15VAC. Remote 240 to 12V transformer required.
Output: 9VDC @ D3=350mA,
D7=700mA

COLOUR

Asymmetric

ACCESSORIES

- 2 2700K
- 3 3000K
- 4 4000K
- 39 3000K,90+ CRI

- CIK
- CGS

CABLE JOINT KIT
CUSTOM GLARE
SHIELD

MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN
- COP SOLID COPPER
- SS STAINLESS STEEL

PRODUCT CONFIGURATION