

Cube Bollard Cloak

CBOLCL-X

DESCRIPTION

The Cube Bollard is ideal for illuminating walkways and pathways. With its sleek, simple yet bold appearance, these bollards will greatly enhance your outdoor space with a distinctive modern flair.

PURE LED

| | |
|------------------------|--|
| LED Chip | Cree XPG-3 Plug and Play, field replaceable PCB board, 3Vf |
| Output | 120 Lumens @ 700mA max |
| Lumens Per Watt | 70lm/W, 60lm/W, 60lm/W |
| Power Consumption | 2.1 watts @700mA |
| Colour Temperature | 2700K, 3000K and 4000K |
| CRI Warm White (3000K) | 90 standard |
| Beam Angle | Asymmetric & 360 Degrees* Pending aperture |

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

| | |
|--------------------|--|
| Materials | Powdercoated Aluminium |
| Ingress Protection | IP66 |
| Standards | AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE |



POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***

** See pages 2,6-9 power supplies

*** See pages 11-12 power supplies

CATEGORY
POLE MOUNTED

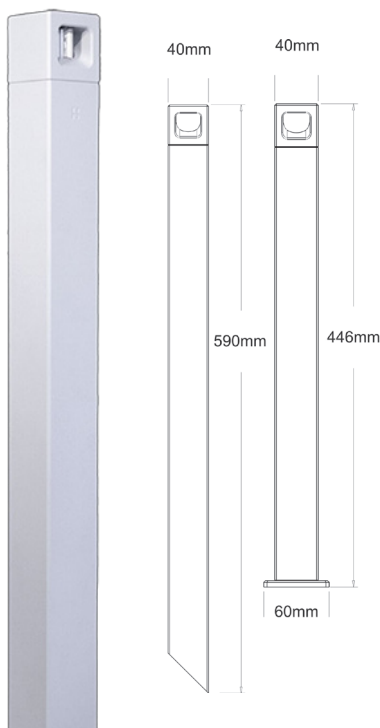

Plan View
Apertures

PRODUCT CONFIGURATION

LUMINAIRE

- CBOLCL1
- CBOLCL2
- CBOLCL3
- CBOLCL4

POWER

- /L/S 700mA INPUT (CC) SERIES WIRED
- /L/B3 1W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/B7 2W, 12VAC INPUT (CV) PARALLEL WIRED

COLOUR

- 2 2700K
- 3 3000K
- 4 4000K
- A AMBER
- B BLUE
- R RED

ACCESSORIES

- CJK CABLE JOINT KIT
- FM FLANGE MOUNT

MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
3VDC@700mA,
700mA maximum

/L/B PURELED PARALLEL WIRED

Remote 240V to 8-24VAC transformer required.
Buck Bullet Driver on Flex.
Input: 8-24VAC.
Output: 3VDC @ B3=350mA, B7=700mA