

Tier Light Wall Mount

TLWM

DESCRIPTION

This fitting is the wall-mountable version of the Tier Light. It provides 360 degree illumination on a horizontal plane without projecting vertical light. It is ideal for lighting areas like porches and entranceways.

PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	510 lumens @ 1050mA max
Lumens Per Watt	85lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	360 degrees

*Specification for pureled only for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL1838, CSA C22.2 No. 250.7

POWER SUPPLY OPTIONS


DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies



CATEGORY
WALL MOUNT

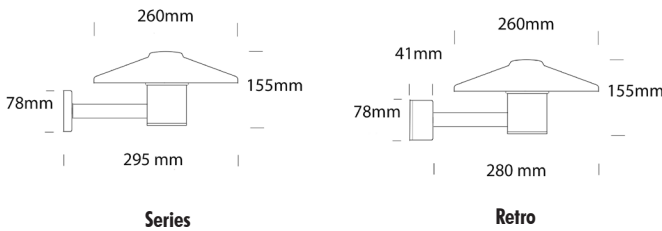

PRODUCT CONFIGURATION

LUMINAIRE

TLWM

POWER

/L/S

/L/D3

/L/D7

/L/D10

R

MR16

MR16/R

GU10

BEAM

360

COLOUR

360°

ACCESSORIES

2

3

4

2700K

3000K

4000K

BOLOP

CJK

OPAQUE LENS

CABLE JOINT KIT

MATERIAL/ FINISH

ALUMINIUM

BK

BZ

OGR

WH

WB

DG

STAR

CT

COP

SS

BLACK

BRONZE

OLIVE GREEN

WHITE

WHITE BIRCH

DARK GREY

SILVER STAR

CORTEN

SOLID COPPER

STAINLESS STEEL

/L/S PURELED SERIES WIRED,
Remote constant current driver required.
Individual fixtures require:
6VDC@1050mA, 1050mA maximum

/L/D PURELED PARALLEL WIRED,
Remote 240VAC - 12VAC transformer required. Hunza integrated plug and play driver included.
Input:9-15VAC.
Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA

/L/R PURELED 110/240VAC RETRO DRIVER
Input: 110-240VAC, 12 watt max (driver included)
Output: 1-18VDC, 700mA