


Euro Single Pole

ESPL

DESCRIPTION

The Euro Single Pole Light is an extra compact luminaire, designed for situations where the fixture needs to be unobtrusive or concealed. This luminaire is ideal for path lighting, tree lighting and the head may be aimed downward to eliminate vertical light. This luminaire has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation with a built in glare guard.

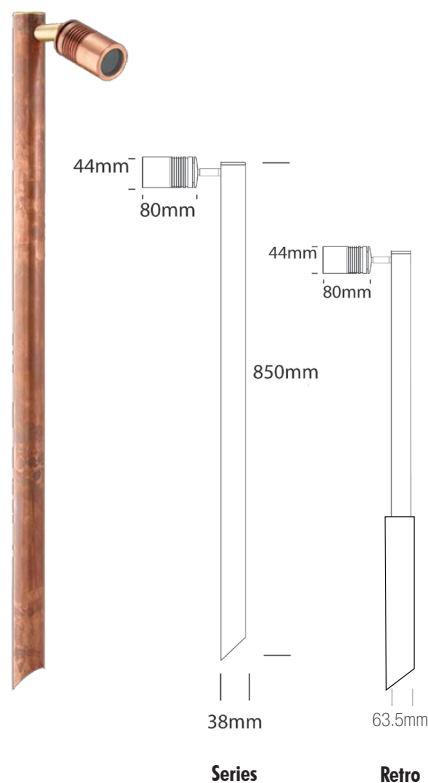

PURE LED

LED Chip	Cree XHP-50-2 Plug and Play field replaceable LED board, 6Vf
Output	420lumens @ 700mA
Lumens Per Watt	105lm/W
Power Consumption	4.2 Watts @ 700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, there is no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

Materials	Solid Copper or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN)

** See pages 2,6-7,9 power supplies

*** See pages 11-12 power supplies

CATEGORY
POLE MOUNTED

LUMINAIRE

ESPL

POWER

- /L/S 1050mA INPUT (CC) SERIES WIRED
- /L/D3 2W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D7 4W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/R RETRO, 10/240V DRIVER

BEAM

- 15
- 25
- 38
- 60

COLOUR

- 15°
- 25°
- 38°
- 60°

ACCESSORIES

- 2
- 3
- 4

- 2700K
- 3000K
- 4000K

- FL
- CJK
- LKN
- HCL
- FM

- FROSTED LENS
- CABLE JOINT KIT
- LOCKING KNUCKLE
- HEX CELL LOUVRE
- FLANGE MOUNT

MATERIAL/ FINISH

- COP
- SS

- SOLID COPPER
- STAINLESS STEEL

/L/S PURELED SERIES WIRED

Remote constant current driver required.
Individual fixtures require:
6VDC@700mA,
700mA maximum

/L/D PURELED PARALLEL WIRED

Remote 240VAC - 12V AC transformer required.
Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA,

/L/R PURELED 110/240VAC RETRO DRIVER:

Input: 110/240VAC, 12 Watt max (included)
Output: 1-18VDC, 700mA

PRODUCT CONFIGURATION