

Floor Light

FLSP

DESCRIPTION

The Floor Light is an uplighter that has an extremely low profile which can be walked on without damaging the luminaire. All Floor lights are supplied with a mounting canister.



PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 Lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 Watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, for retrofit lamp options please see alternative lamps page.

PHYSICAL PROPERTIES


Materials	Solid Copper or 316 Stainless Steel
Ingress Protection	IP67
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** | TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***
NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN) | NO DRIVER REQ FOR GU10


** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

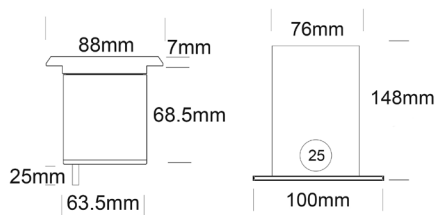

Floor Canister

CATEGORY
RECESSED & INGROUND

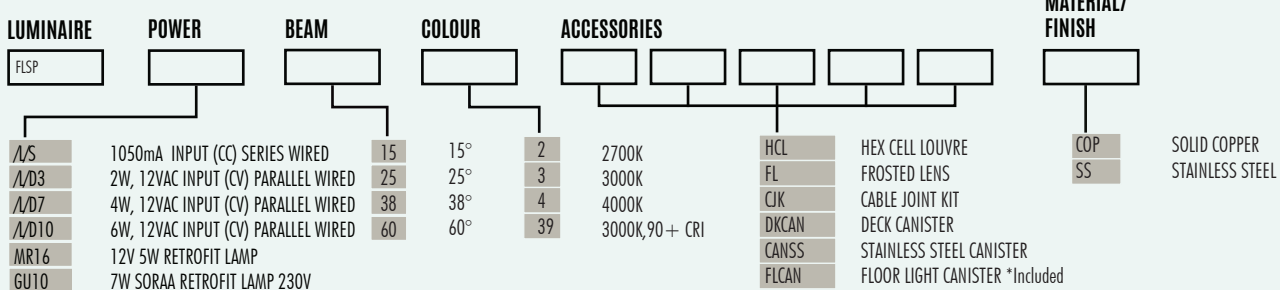

<p>/L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 6VDC@1050mA, 1050mA maximum</p>	<p>/L/D PURELED PARALLEL WIRED Remote 240VAC-12VAC transformer required. Hunza integrated plug and play driver included. Input:9-15VAC. Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA</p>
---	--

PRODUCT CONFIGURATION