

Mouse Square

MOUSESQ/L

DESCRIPTION

The Mouse Light Square is designed for vertical surface mounting in gardens and landscapes. The shape is pleasing to the eye and blends unobtrusively into any environment. A space in the wall behind the luminaire is not required for cable connection due to the design which includes a cable joint cavity. There is no light directed upward or forward into the eye. This luminaire features a stainless steel reflector for better light projection.

PURE LED	
LED Chip	Cree XPG-3 Plug and Play, field replaceable PCB board, 3Vf
Output	120 lumens @ 700mA max
Lumens Per Watt	60lm/W
Power Consumption	2.1 watts @ 700mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	120 degrees


*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES	
Materials	Solid Bronze or 316 Stainless Steel
Ingress Protection	IP56/IP66
Standards	AS/NZS 61046, UL1838, CSA C22.2 No. 250.7

POWER SUPPLY OPTIONS	
DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** I TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)*** NO DRIVER REQ FOR RETRO 'R' (INTEGRAL 230V IN)	

** See pages 3,6-9 power supplies

*** See pages 11-12 power supplies

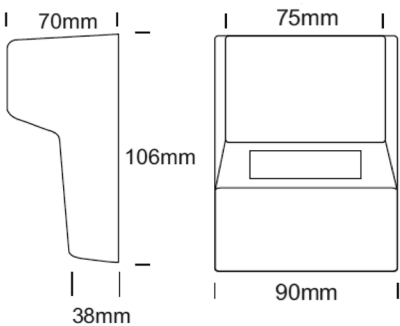

PRODUCT CONFIGURATION

LUMINAIRE

MOUSESQ

/L/S

/L/B3

/L/B7

/L/R

POWER

700/1050mA INPUT (CC) SERIES WIRED

1W, 12VAC INPUT (CV) PARALLEL WIRED

2W, 12VAC INPUT (CV) PARALLEL WIRED

RETRO, 110/240V DRIVER

BEAM

120°

COLOUR

120°

ACCESSORIES

2

3

4

2700K

3000K

4000K

CJK

CABLE JOINT KIT

MATERIAL/ FINISH

SBZ

SS

SOLID BRONZE

STAINLESS STEEL

/L/S PURELED SERIES WIRED,
Remote constant current driver required.
Individual fixtures require:
3VDC@700mA

/L/B PURELED PARALLEL WIRED,
Remote 240VAC - 12VAC transformer required. BuckBullet driver on flex included.
Input: 8-24VAC
Output: 3VDC @ 700mA

/L/R PURELED 110/240VAC RETRO DRIVER
Input: 110-240VAC, 5 watt total (driver included).
Output: 3VDC, 700mA