

Catenary

CAT

DESCRIPTION

The Catenary Mount is a single spotlight which has been specially designed for transverse suspension lighting systems. This provides a dynamic moon lighting effect and can be used for illuminating pathways, streets and walkways.




PURE LED	
LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 watts @ 1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

*Specification for pureled only, there are no other alternative lamp sources for this fixture.

PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	AS/NZS 61046, UL 1838, 2108, CSA C22.2 No. 250.7, 250.0-08, CE

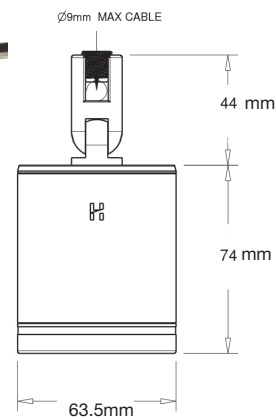

POWER SUPPLY OPTIONS

TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT)***

*** See pages 11-12 power supplies

CATEGORY
CEILING MOUNT

LUMINAIRE

CAT

POWER

- /L/D3 2W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D7 4W, 12VAC INPUT (CV) PARALLEL WIRED
- /L/D10 6W, 12VAC INPUT (CV) PARALLEL WIRED

/L/D PURELED PARALLEL WIRED

Remote 240V - 12VAC transformer required.
Hunza integrated plug and play driver included.
Input: 9-15VAC.
Output: 6VDC @ D3=350mA,
D7=700mA, D10=1050mA

BEAM

- 15
- 25
- 38
- 60

COLOUR

- 15°
- 25°
- 38°
- 60°

ACCESSORIES

- 2700K
- 3000K
- 4000K
- HCL
- GG
- SNT
- FL
- HEX CELL LOUVRE
- GLARE GUARD
- SNOOT
- FROSTED LENS

MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN
- COP SOLID COPPER
- SS STAINLESS STEEL

PRODUCT CONFIGURATION