


Step Light Eyelid

SLE

DESCRIPTION

The Step Light Eyelid is designed with a 88mm flange and recessed body for flush mounting into masonry, stone or wood, providing illumination of steps and low level features such as exterior paved areas. The Eyelid feature eliminates all upward light, providing an excellent glare-free illuminating effect. The Step light Canister for installation is included with the fitting. Alternatively, screw holes in the flange are available when requested. This alternative mounting can be used when direct fix mounting into wooden decking.

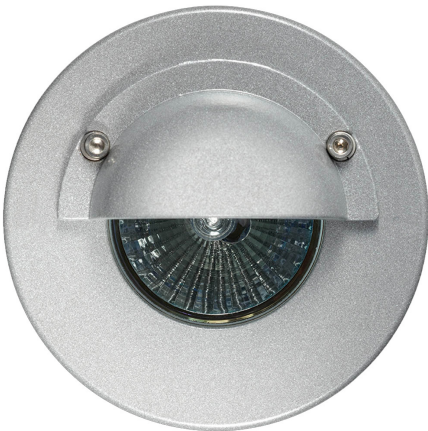

| PURE LED | |
|------------------------|---|
| LED Chip | Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf |
| Output | 600 lumens @ 1050mA max |
| Lumens Per Watt | 100lm/W |
| Power Consumption | 6 Watts @1050mA |
| Colour Temperature | 2700K, 3000K and 4000K |
| CRI Warm White (3000K) | 90 standard |
| Beam Angle | 15, 25, 38, 60 degrees |


*Specification for pureled only for retrofit lamp options please see alternative lamps page.

| PHYSICAL PROPERTIES | |
|---------------------|---|
| Materials | Powdercoated Aluminium, Solid Copper |
| Ingress Protection | IP66 |
| Standards | AS/NZS 61046, UL1838, CSA C22.2 No. 250.7 |

| POWER SUPPLY OPTIONS | |
|---|--|
| DRIVER REQ FOR SERIES WIRED (CC FORMAT) ** TRANSFORMER REQ FOR PARALLEL WIRED (CV FORMAT) *** | |
| NO DRIVER REQ FOR GU10 | |

** See pages 3-5,7,9 power supplies

*** See pages 11-12 power supplies

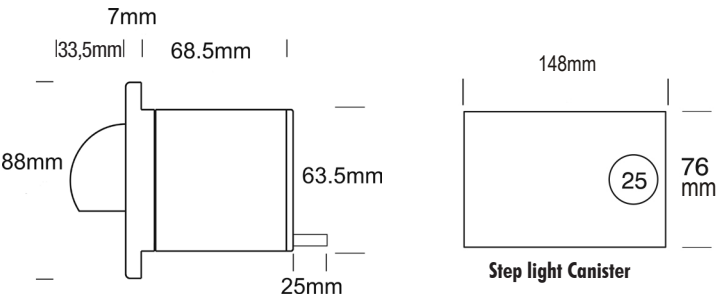

PRODUCT CONFIGURATION

| LUMINAIRE | POWER | BEAM | COLOUR | ACCESSORIES | | | | MATERIAL/ FINISH | |
|--|-------------------------------------|--|--------|-------------|-------|-------|------------------------------|------------------|--------------|
| SLE | | | | | | | | | |
| /S | 1050mA INPUT (CC) SERIES WIRED | 15 | 15° | 2 | 2700K | HCL | HEX CELL LOUVRE | BK | BLACK |
| /D3 | 2W, 12VAC INPUT (CV) PARALLEL WIRED | 25 | 25° | 3 | 3000K | FL | FROSTED LENS | BZ | BRONZE |
| /D7 | 4W, 12VAC INPUT (CV) PARALLEL WIRED | 38 | 38° | 4 | 4000K | CJK | CABLE JOINT KIT | OGR | OLIVE GREEN |
| /D10 | 6W, 12VAC INPUT (CV) PARALLEL WIRED | 60 | 60° | | | TLTM | TILTING MODULE | WH | WHITE |
| MR16 | 12V 5W RETROFIT LAMP | | | | | DKCAN | DECK CANISTER | WB | WHITE BIRCH |
| GU10 | 7W SORAA RETROFIT LAMP 230V | | | | | SLCAN | STEP LITE CANISTER *Included | DG | DARK GREY |
| | | | | | | CANSS | STAINLESS STEEL CANISTER | STAR | SILVER STAR |
| | | | | | | | | CT | CORTEN |
| | | | | | | | | COP | SOLID COPPER |
| /L/S PURELED SERIES WIRED Remote constant current driver required. Individual fixtures require: 6VDC@1050mA, 1050mA maximum | | /L/D PURELED PARALLEL WIRED Remote 240VAC - 12V AC transformer required. Hunza integrated plug and play driver included. Input: 9-15VAC. Output: 6VDC @ D3=350mA, D7=700mA, D10=1050mA | | | | | | | |