


DRAWING NO. C246500001	REV C	Customer Drawing	REVISION HISTORY		
			REV	DESCRIPTION (ECO)	DATE APPROVED
			B	ADD SPRING PSI RATE, ECN 5281	6/27/12 AK
			C	UPDATE DESCRIPTION FOR BONDABLE ADAPTOR ECO 6216	9/17/14 AK

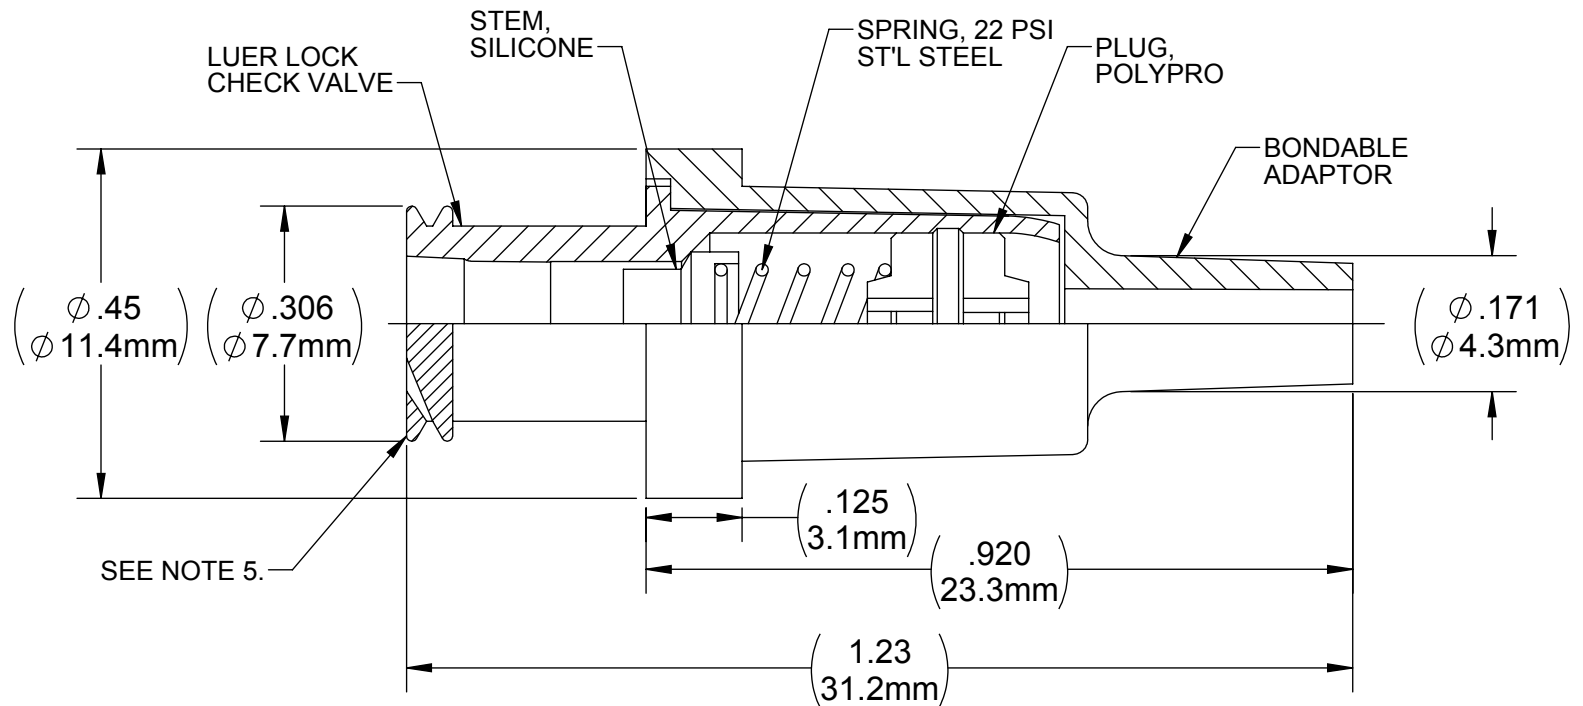

NOTES:

1. MATERIAL: CLEAR PVC
2. CRITICAL DIMENSIONS ARE CIRCLED, AND SUBJECT TO INSPECTION.
3. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.
4. ALL DIMENSIONS ARE IN INCHES WITH NOMINAL DIMENSION IN METRIC BELOW.
5. LUER COMPATIBLE WITH ISO594-2


QUALITY CRITERIA:

O.D. FLASH: 0.015 MAX. (0.4MM)
GATE VESTIGE: 0.01 MAX. (0.3MM)
EMBEDDED PARTICLES, BUBBLES, SPOTS, STAINS: 0.3mm ² MAX. NO MORE THAN 3 PER PART.

MOLDED PARTS:
GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.

DRAWN BY DMC	DATE 4/9/12
APPROVED BY	DATE
MATERIAL	
FINISH	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005	
THIRD ANGLE PROJECTION	



Halkey-Roberts

**TITLE LUER LOCK CHECK VALVE
W / BONDABLE ADAPTOR**

SIZE A	DRAWING NO. C246500001	REV C
SCALE 4:1	DO NOT SCALE DRAWING	SHEET 1 OF 2