



DRAWING NO. C770RPMXX	REV C	Customer Drawing	REVISION HISTORY		
			REV	DESCRIPTION (ECO)	DATE APPROVED
			B	UPDATE NOTES, BORDER, ADD METRIC DIM'S ECN 4240	11/10/09 AK
			C	UPDATE ORING CALLOUT TO READ NEOPRENE ECO 6588	7/20/15 LF

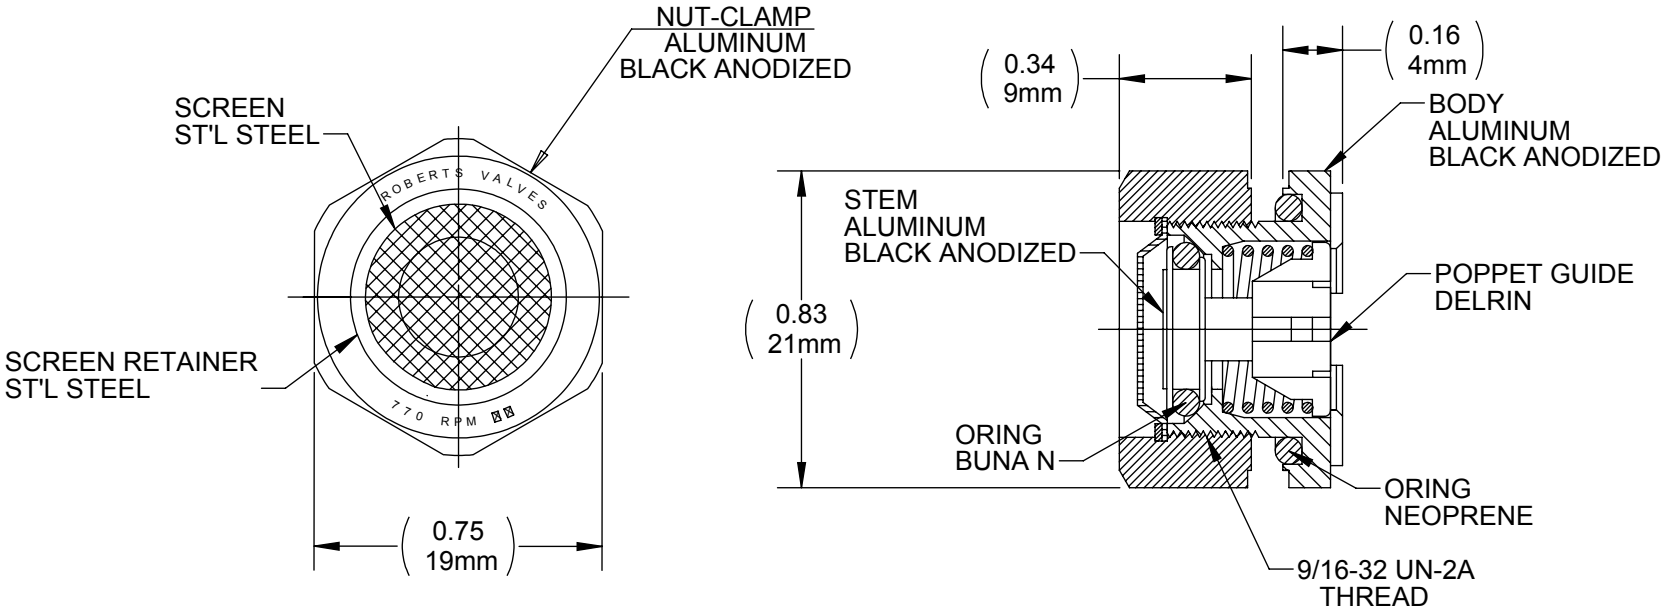

NOTE:

- SUFFIX INDICATES CRACKING PRESSURE 0 - 10 PSIG AS PER CUSTOMER REQUIREMENTS.
- CRACKING PRESSURE: ± 15% OF NOMINAL; RESEAT WITHIN 20% OF NOMINAL CRACKING PRESSURE.
- TEMPERATURE RANGE: -80° TO 180°F.
- RUBBER: MIL-R 6855 BUNA N
- ANODIZE: BLACK MIL-A-8625, TYPE II, NICKEL ACETATE SEAL.
- CRITICAL DIMENSIONS ARE CIRCLED AND SUBJECT TO INSPECTION.
- DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.
- ALL DIMENSIONS ARE IN INCHES WITH NOMINAL DIMENSIONS IN METRIC BELOW.

MOLDED PARTS: GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA		FINISH		RELIEF VALVE PRESSURE		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: $\pm 1^{\circ}$ TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .005$		THIRD ANGLE PROJECTION		
						
				SIZE A	DRAWING NO. C770RPMXX	REV C
				SCALE 2:1	DO NOT SCALE DRAWING	SHEET 1 OF 1