


Product Features

- IP65 outdoor use
- Made with LM-80 certified SMD LED chips
- 160 degree beam angle
- Self Cleaning and No Maintenance Required
- Non Yellowing Diffuser (UV Stable)
- Impact Resistant
- Aluminium Casting
- Tools Only Accessible
- Spare Parts Available
- Designed for industrial building perimeters

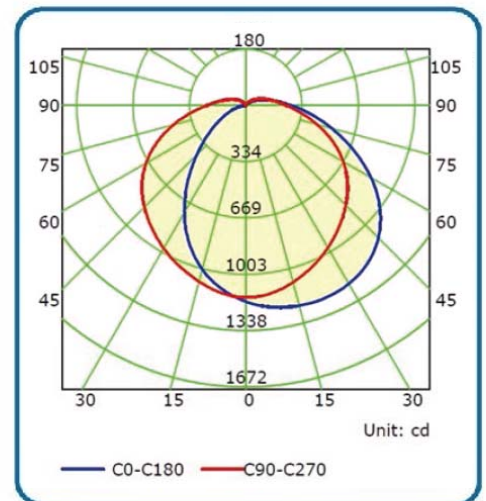

Application: Outdoor bunker light replacement, LED safe movement lighting

Model	SE-LED-603
Watts	50W
Input Voltage	AC 100~277V
Colour Temp.	5500K
Lumens Output	4500lm
Dimension (L*W*D)	308*264*182mm
IP Grade	IP65
Housing Colour	Black

