

KI-4TWMIC3

4MP IP True WDR Turret with Built-in Mic

Features


- 4MP Resolution
- True WDR
- Built-in MIC
- H.265/H.265+
- IP67
- 2.8mm Fixed Lens
- Micro SD Card Slot
- 12VDC, PoE
- ϕ 5"x3.8"
- IR up to 100ft



Specification

Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	2.8mm @ F1.2
Angle adjustment	Pan: 0° ~ 355°, tilt 0° ~ 75°
Digital noise reduction	3D DNR
Wide dynamic range	True WDR 120dB
Day & night	ICR
Video compression	H.264 / H.264+ / MJPEG / H.265 / H.265+
Dual stream	Yes
Audio	Built-in MIC
Max. image resolution	2688 x 1520
Frame rate	30fps (2688 x 1520)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser
BLC	Yes, zone configurable
On Board Storage	Micro SD slot, up to 128GB
Alarm trigger	Motion detection, tampering alarm
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
API	ONVIF(PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General functionalities	User authentication, watermark
Communication interface	1 RJ45 10M/ 100 M Ethernet interface
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) humidity 95% or less (non-condensing)
Power supply	12 VDC +/- 10%, PoE (802.3af)
Power consumption	Max, 5W (7W with ICR on)
Ratings	IP67
IR range	Up to 100ft
Dimensions	Ø 127 x 97.5 mm (5"x3.8")
Weight	670g (1.5 lbs)
Wall Mount	KI-2130B-T
Electrical Box	KI-AE285-M

Dimension

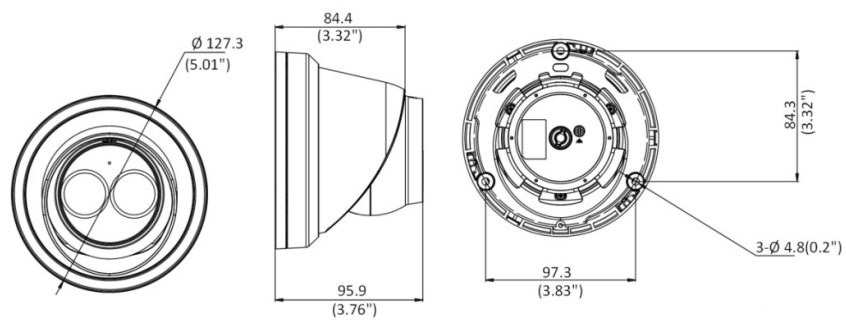

Mount Option



Wall Mount
KI-2130B-T



Electrical Box
KI-AE285-M