

KI-6BWE4

6MP IP True WDR EXIR Bullet

Features


- 6MP Resolution
- True WDR
- H.265/H.265+
- IP67
- IR up to 150ft
- 4mm Fixed Lens
- Micro SD Card Slot
- 12VDC, PoE
- $\phi 4.13'' \times 11.8''$



Specification

Image Sensor	1/2.9" progressive scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	4mm @ F2.0
Digital noise reduction	3D DNR
Wide dynamic range	True WDR 120dB
Day & night	ICR
Video compression	H.264 / H.264+ / MJPEG / H.265 / H.265+
Dual stream	Yes
Max. image resolution	3072x2048
Frame rate	20fps(3072x2048), 30fps(2560x1440)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser
BLC	Yes, zone configurable
On Board Storage	Micro SD slot, up to 128GB
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
API	ONVIF(PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Security	User Authentication, reset button, flickerless, dual stream, heartbeat, mirror, watermark
Communication interface	1 RJ45 10M/ 100 M Ethernet interface
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC +/- 10%, PoE (802.3af)
Power consumption	Max, 12.5W
Ratings	IP67
IR range	Up to 150ft
Dimensions	$\phi 4.13'' \times 11.8''$
Weight	2.65lbs
Electrical Box	KI-AE260

Dimension

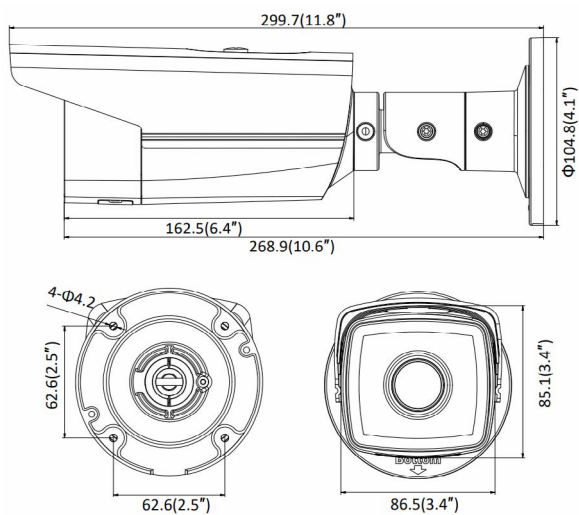

Mount Option



Electrical Box
KI-AE260