

# KI-6DWAMZ2812

## 6MP IP True WDR Motorized Dome

### Features


- 6MP Resolution
- True WDR
- H.265/H.265+
- IP67, IK10
- IR up to 100ft
- 2.8~12mm Motorized
- Audio, Alarm I/O
- Micro SD Card Slot
- 12VDC, PoE
- $\phi 6.04'' \times 5.24''$



### Specification

Image Sensor	1/2.9" progressive scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	2.8 – 12mm @ F1.6
Digital noise reduction	3D DNR
Wide dynamic range	True WDR 120dB
Day & night	ICR
Video compression	H.264 / H.264+ / MJPEG / H.265 / H.265+
Audio I/O	1/1
Alarm I/O	1/1
Max. image resolution	3072×2048
Frame rate	20fps(3072×2048), 30fps(2560×1440)
BLC	Yes, zone configurable
On Board Storage	Micro SD slot, up to 128GB
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception, storage error
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
API	ONVIF(PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Communication interface	1 RJ45 10M / 100M ethernet port
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) humidity 95% or less (non-condensing)
Power supply	DC12V $\pm$ 10%, PoE (802.3af)
Power consumption	Max. 11.5W
Ratings	IP67, IK10
IR range	Up to 100ft
Dimensions	$\phi 6.04'' \times 5.24''$
Weight	2.84 lbs
Wall Mount	KI-AW4155
Ceiling Pendent Mount	KI-AC4155
Electrical Box	Included with Camera

## Dimension

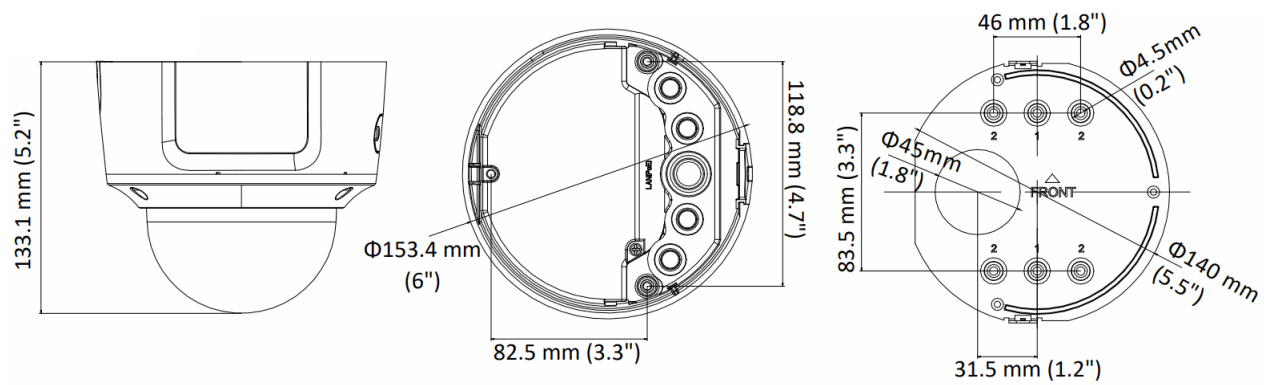

## Mount Option



Wall Mount  
KI-AW4155



Pendent Mount  
KI-AC4155