

# KI-6LDWMIC3

## 6MP IP True WDR Low-profile Dome

### Features


- 6MP Resolution
- True WDR
- H.265/H.265+
- Built-in MIC
- IP66, IK08
- IR up to 30ft
- 2.8mm Fixed Lens
- Micro SD Card Slot
- 12VDC, PoE
- $\phi 4.33'' \times 2.22''$



### Specification

Image Sensor	1/2.9" progressive scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	2.8mm @ F2.0
Digital noise reduction	3D DNR
Wide dynamic range	True WDR 120dB
Day & night	ICR
Video compression	H.264 / H.264+ / MJPEG / H.265 / H.265+
Audio	Built-in MIC
Dual stream	Yes
Max. image resolution	3072x2048
Frame rate	20fps(3072x2048), 30fps(2560x1440)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser
BLC	Yes, zone configurable
On Board Storage	Micro SD slot, up to 128GB
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception, storage error
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
API	ONVIF(PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Communication interface	1 RJ45 10M / 100M ethernet port
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) humidity 95% or less (non-condensing)
Power supply	DC12V $\pm$ 10%, PoE (802.3af)
Power consumption	Max. 9.5W
Ratings	IP66 / IK08
IR range	Up to 30ft
Dimensions	$\phi 4.33'' \times 2.22''$
Weight	250g (0.88 lbs)
Wall Mount	KI-AW2110B
Ceiling Pendent Mount	KI-AC2110

## Dimension

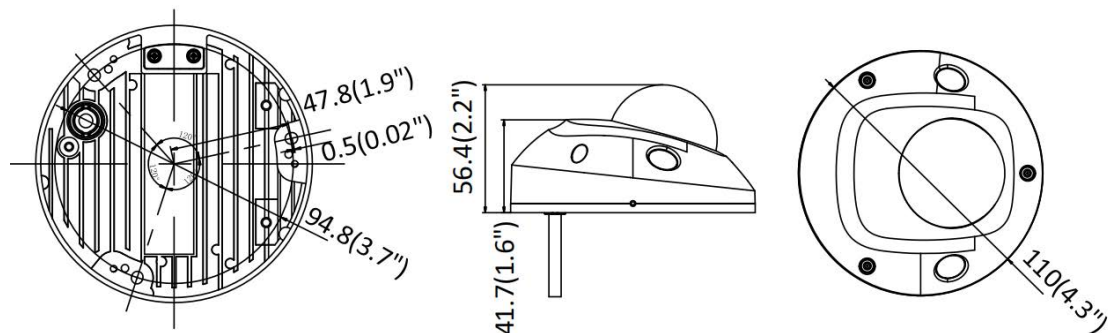

## Mount Option



**Wall Mount**  
KI-AW2110B



**Pendent Mount**  
KI-AC2110