

KI-8BW3

8MP IP True WDR Mini Bullet

Features


- 8MP Resolution
- True WDR
- H.265/H.265+
- IP67
- IR up to 100ft
- 2.8mm Fixed Lens
- Micro SD Card Slot
- 12VDC, PoE
- $\Phi 2.8'' \times 6.1''$



Specification

Image Sensor	1/2.5" progressive scan CMOS
Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	2.8mm @ F2.0
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Wide dynamic range	True WDR 120dB
Video compression	H.265 / H.265+ / H.264+ / H.264 / MJPEG
Max. image resolution	3840x2160
Frame rate	15fps (3840x2160), 30fps (2560x1920)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser
Storage	NAS, on board 128GB SD card slot
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
Security	User Authentication, reset button, flickerless, dual stream, heartbeat, mirror, watermark
Communication interface	1 RJ45 10M/ 100 M Ethernet interface
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC +/- 10%, PoE (802.3af)
Power consumption	12 VDC, 0.5 A, max. 6 W PoE: (802.3af, 36V to 57V), 0.2 A to 0.1 A, max. 7.5W
Weather proof rating	IP67
IR range	UP to 100ft
Dimension	$\Phi 2.8'' \times 6.1''$
Weight	0.9lbs
Electrical Box	KI-AE280-XS

Dimension

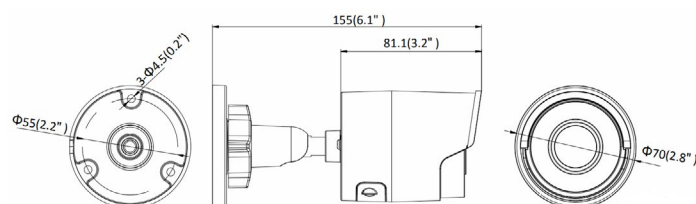

Mount Option



Electrical Box
KI-AE280-XS