


BULK CURRENT INJECTION

The F-120-6A is a broadband, high efficiency injection probe. Large RF currents can be coupled on to a signal or power circuit under test between 10 kHz – 400 MHz. The probe has an insertion loss of <9 dB or less over the 1.8 MHz – 400 MHz region.



F - 120-6A

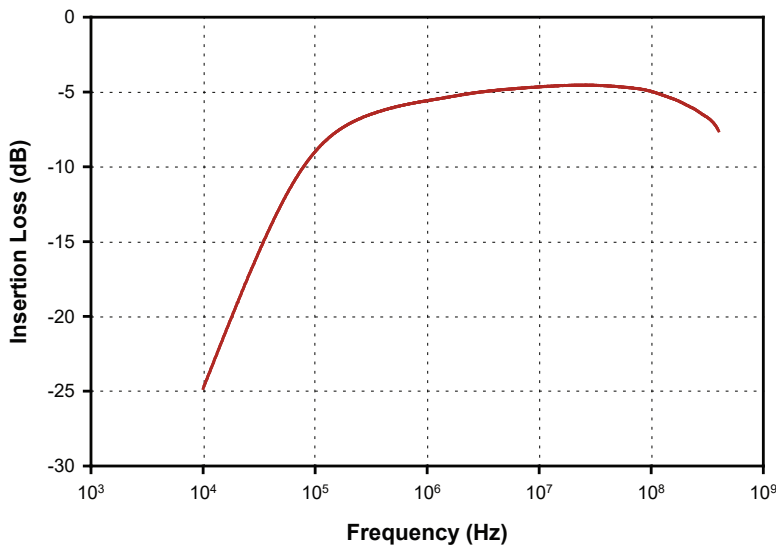

Specifications

Frequency: 10 kHz – 400 MHz
Inner diameter: 40 mm
Outer diameter: 127 mm
Height: 70 mm
Input Power rating: 100 watts for 30 minutes
150 watts for 15 minutes
200 watts for 5 minutes

Accessories

FCC-BCICF-1 • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz
F-52 • Current Probe
Bandwidth: 10 kHz – 400 MHz

FCC®

Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.