


F - 140-HV

BULK CURRENT INJECTION

The F-140-HV is used for BCI testing in accordance with DO-160, section 20, as well as Pulse Inductive Damped Sinusoid testing in accordance with DO-160, section 22.

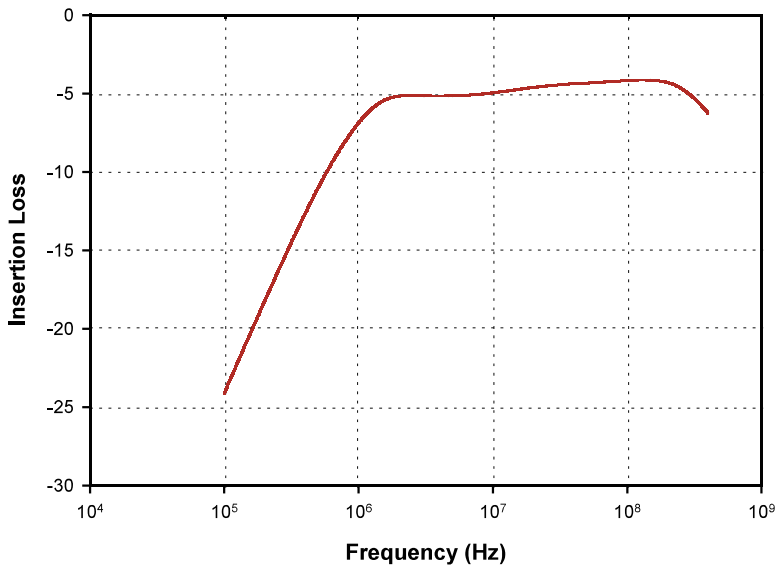

Specifications

- Frequency: 100 kHz – 400 MHz
- Inner Diameter: 40 mm
- Outer Diameter: 127 mm
- Height: 70 mm
- Input Power rating: 100 watts
- RF Connector: HN Female

Accessories

- FCC-BCICF-1-HV • Calibration Fixture
Bandwidth: 10 kHz – 400 MHz
- F-52-40 mm • Current Probe
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.