
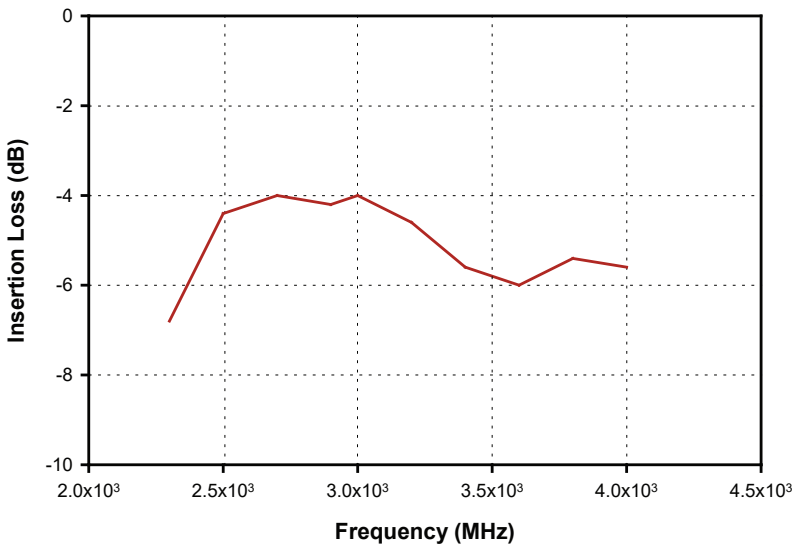


F - 150-1

BULK CURRENT INJECTION

The F-150-1 has been designed to extend the use of conducted immunity testing over the bandwidth of 2.3 – 7.0 GHz. Pursuing this effort, the F-150-1 combines high efficiency, high power rating, and compact size. This allows the device to be used in the testing of individual cable harnesses during benchtop testing as well as cable harnesses inside vehicles.

Per standard substitution methods used in ISO 1145-4/ISO 11452-4, Mil-Std. 461/462, and FAA DO-160. The F-150-1 requires 20 watts to develop up to 300 milliamperes into a calibration fixture with a 100 Ω loop line impedance.

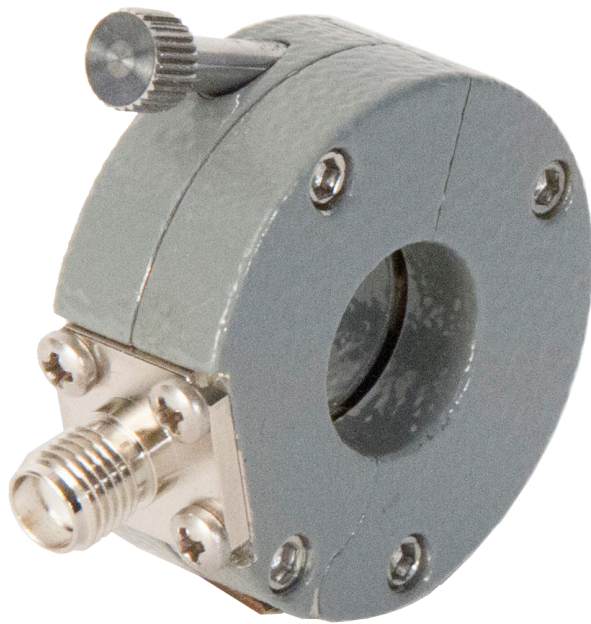

Specifications

Frequency: 2.3 GHz – 7.0 GHz
Inner diameter: 12 mm
Outer diameter: 33 mm
Height: 13 mm
Input Power rating: 250 watts (30 minutes)

Accessories

FCC-BCICF-150-1 • Calibration Fixture
Bandwidth: 1 GHz – 7.5 GHz
F-070430-1005-1 • Current Probe
Bandwidth: 1 GHz – 7.5 GHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.