



## ***FREEVIEW HD SETUP WITH SATELLITE (S2) CONNECTION***




1. Click on **TV** on your home page – **TV** is next to **Media Centre** (see home page screen below)

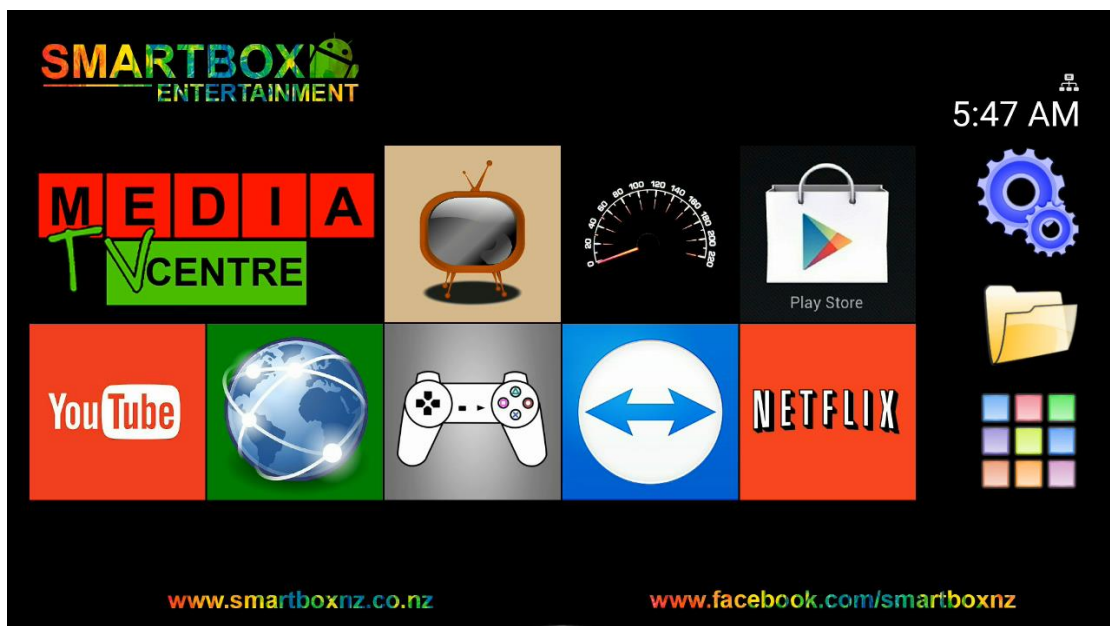

2. Click on **DVBS2** (see image for reference below)

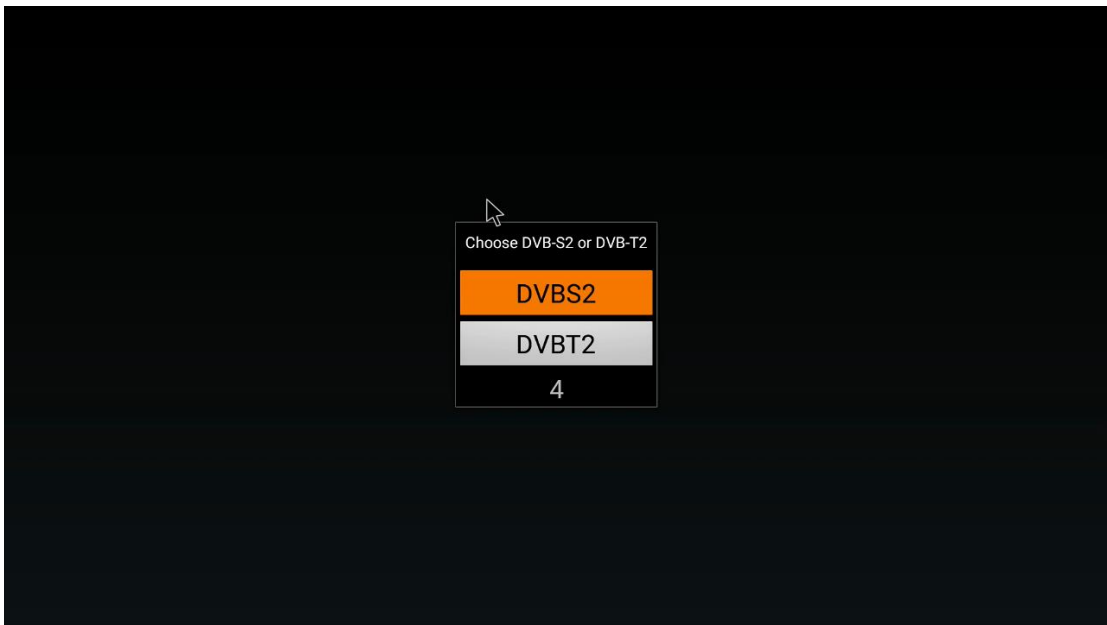

3. You will be greeted with the **TIPS** option (see image below for reference)  
– press **OK** to scan channels

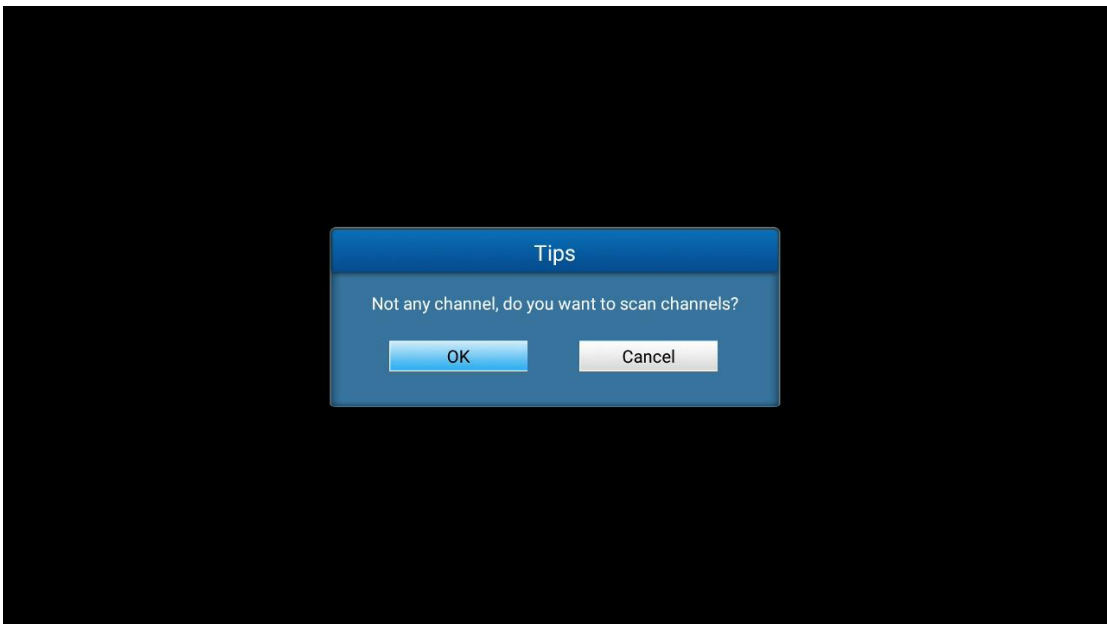


Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)

Website: <https://www.smartboxnz.co.nz>

Facebook Store Page: <https://www.facebook.com/smartboxnz/>


Support Group: <https://www.facebook.com/groups/smartBoxnz/>

4. Click on **Satellite List** (image below for reference)

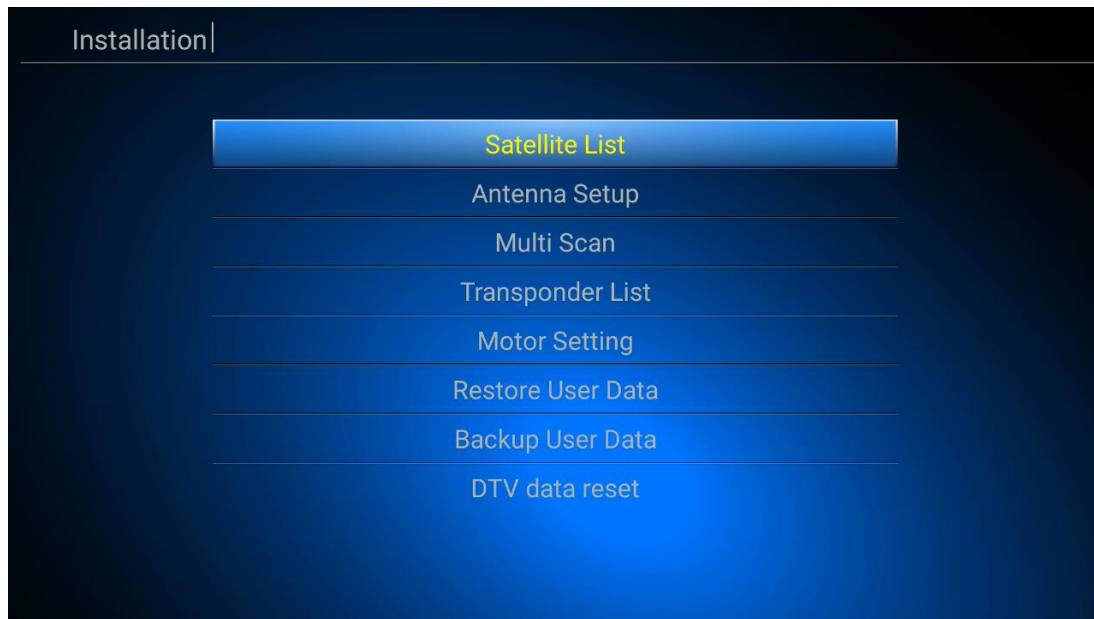

5. These are all the Satellite lists, please un-tick **Astra 2E/2F/2G** (to un-tick, hover over the satellite list and press **OK** button on your remote)

| Satellite List |                                                   |                 |
|----------------|---------------------------------------------------|-----------------|
| NO.            | Satellite Name                                    | Longitude       |
| 012            | Arabsat 5C                                        | 20.0 E          |
| 013            | Eutelsat 21B                                      | 21.0 E          |
| 014            | AfriStar 1                                        | 21.1 E          |
| 015            | Astra 1E/3B, Thor 2A                              | 23.0 E          |
| 016            | Astra 3B                                          | 23.1 E          |
| 017            | Eutelsat 25B                                      | 25.1 E          |
| 018            | Badr 4/5/6                                        | 26.0 E          |
| 019            | Astra 2A/2E/2F/2G                                 | 28.0 E          |
| 020 ✓          | Astra 2E/2F/2G (28.2E)                            | 28.2 E          |
| 021            | Arabsat 5A, Astra 2B/5B, Eutelsat 31A, Turksat 1C | 31.0 E          |
| 022            | Eutelsat 33B/33C/33D/33E, Intelsat 702/802        | 33.0 E          |
| OK             | Select                                            | Add Edit Delete |

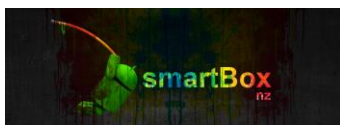

Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)

Website: <https://www.smartboxnz.co.nz>

Facebook Store Page: <https://www.facebook.com/smartboxnz/>

Support Group: <https://www.facebook.com/groups/smartBoxnz/>



6. Find the following **Satellite list (OPTUS D1, OPTUS D2 & OPTUS C1/D3)**

i. **Satellite List Number** is as follows (image below for reference):

- a. **096** – OPTUS D2
- b. **098** – OPTUS C1/D3
- c. **101** – OPTUS D1

| Satellite List                                                                                                                                                                         |                        |           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------|
| NO.                                                                                                                                                                                    | Satellite Name         | Longitude |
| 093                                                                                                                                                                                    | Superbird C2           | 144.0 E   |
| 094                                                                                                                                                                                    | ChinaSat 5B, Palapa C2 | 146.0 E   |
| 095                                                                                                                                                                                    | JCSat 1B               | 150.0 E   |
| 096 ✓                                                                                                                                                                                  | Optus D2               | 152.0 E   |
| 097                                                                                                                                                                                    | JCSat 2A               | 154.1 E   |
| 098 ✓                                                                                                                                                                                  | Optus C1/D3            | 156.0 E   |
| 099                                                                                                                                                                                    | Superbird 3            | 158.0 E   |
| 100                                                                                                                                                                                    | ABS-6                  | 159.0 E   |
| 101 ✓                                                                                                                                                                                  | Optus D1               | 160.0 E   |
| 102                                                                                                                                                                                    | Superbird B2           | 162.0 E   |
| 103                                                                                                                                                                                    | Intelsat 19            | 166.1 E   |
| <input type="button" value="OK"/> <input type="button" value="UnSelect"/> <input type="button" value="Add"/> <input type="button" value="Edit"/> <input type="button" value="Delete"/> |                        |           |

7. Press back/ exit to go to the screen (see image reference below) and pick **Multi Scan**. Tick all the **Satellite** chosen in the last step as per the right image.

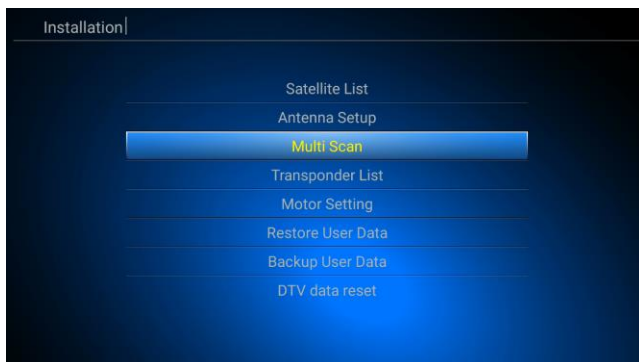


Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)

Website: <https://www.smartboxnz.co.nz>



Facebook Store Page: <https://www.facebook.com/smartboxnz/>

Support Group: <https://www.facebook.com/groups/smartBoxnz/>

8. Press the **Blue Button** on your Remote to start **Scan** and you will be prompted with a pop up box as per image reference below

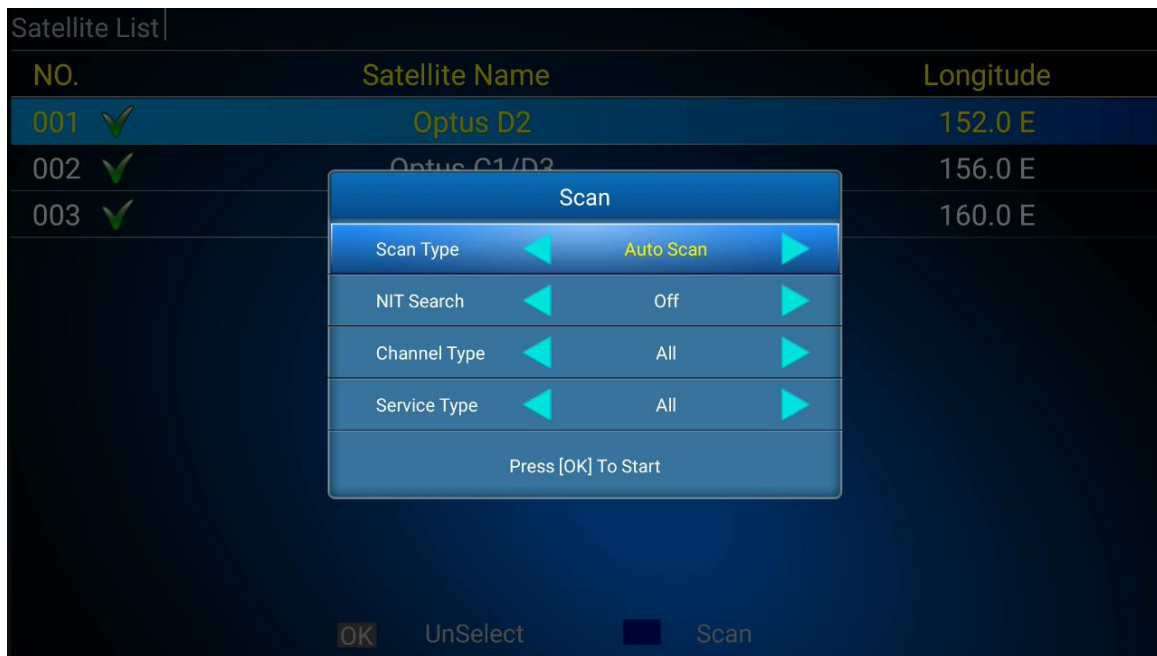

9. Change the **Scan Type** to **BLIND SCAN** & change **Channel Type** to **FTA ONLY** (see image below for reference) when completed, press **OK** to scan

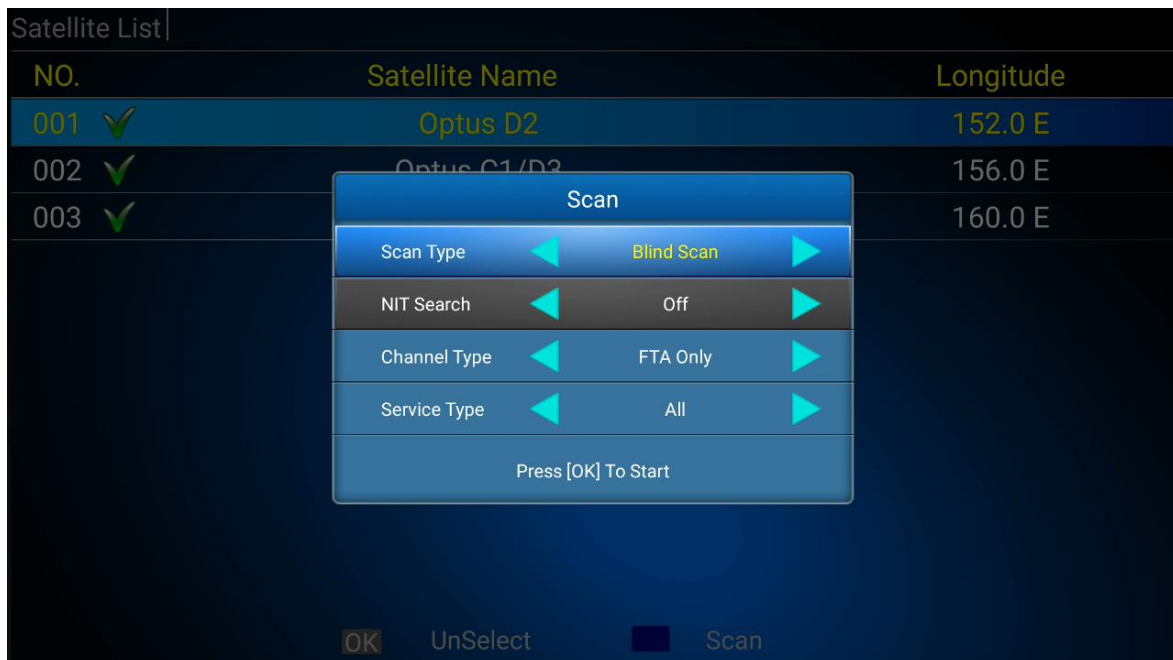

Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)


Website: <https://www.smartboxnz.co.nz>

Facebook Store Page: <https://www.facebook.com/smartboxnz/>

Support Group: <https://www.facebook.com/groups/smartBoxnz/>




10. Scan will now complete as normal and should show you all the local **FREEVIEW CHANNELS** (screen should look like image below to ensure you have followed the steps correctly) – takes approx... 5 – 10 minutes to complete.

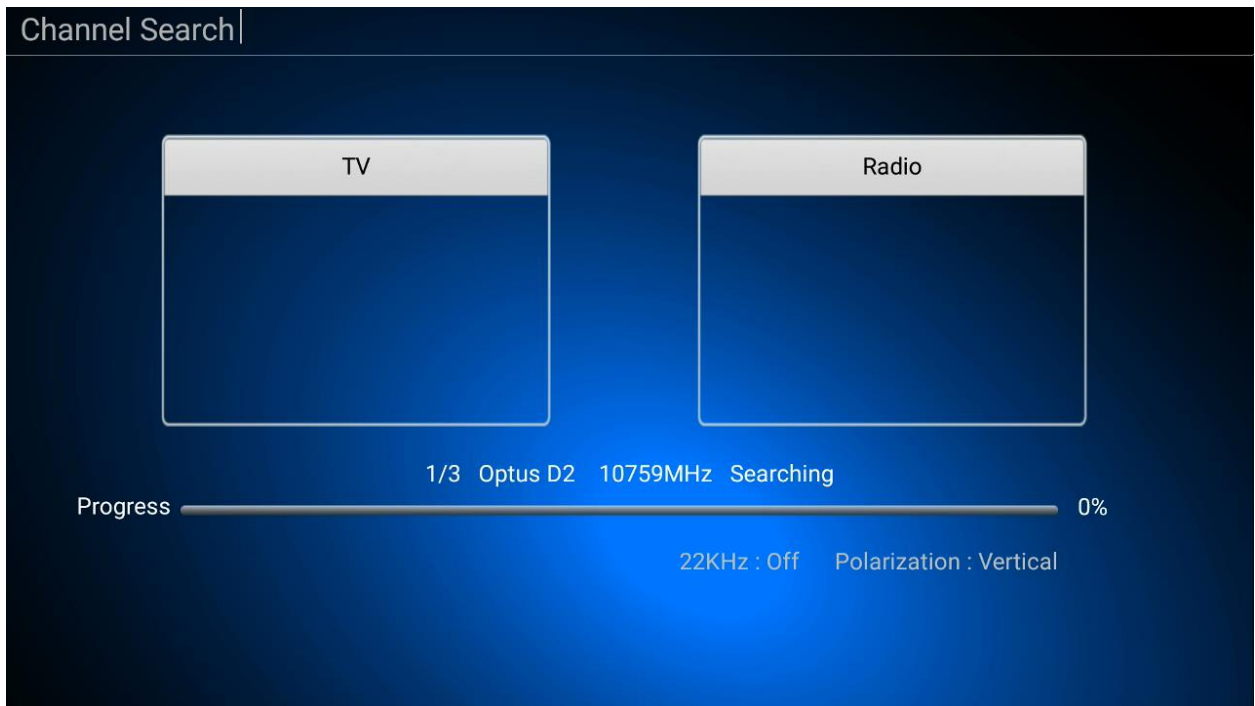

**CONGRATULATIONS!!!!!! YOU NOW HAVE FREEVIEW HD SETUP CORRECTLY**

PLEASE NOTE. Due to Satellite connection, Freeview Channels will not be in Order and will need to be sorted in order by User/ Customer.



Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)

Website: <https://www.smartboxnz.co.nz>

Facebook Store Page: <https://www.facebook.com/smartboxnz/>

Support Group: <https://www.facebook.com/groups/smartBoxnz/>

## IMPORTANT NOTES:

- This guide is **ONLY** for SmartBox customers and should not be distributed to non- members
- Do not share any of our **STEPS** mentioned in this guide as we are able to track usage via our servers and sharing will result in a permanent ban from all SmartBox Groups and future updates.
- **FREEVIEW** is based on your Satellite connection, please do note, we are not able to help you set up your Satellite if the signal strength is weak, this will need to be done via a qualified person.
- **FREEVIEW** can also be accessed directly through your remote by pressing **DTV** button.
- **FREEVIEW** comes with a local TV Guide/ EPG. EPG can be accessed by pressing the EPG button on your remote while watching Freeview.
- If you have any issues, please do not hesitate to contact the team via Facebook Support Group

# ENJOY 😊



Email: [info.smartbox.nz@gmail.com](mailto:info.smartbox.nz@gmail.com)

Website: <https://www.smartboxnz.co.nz>

Facebook Store Page: <https://www.facebook.com/smartboxnz/>

Support Group: <https://www.facebook.com/groups/smartBoxnz/>