



Fully-welded construction for high efficiency and superior sealing

Eaton's SENTINEL filter bags are suitable for a wide range of applications such as the filtration of paints and varnishes, inks, chemicals, process water and many more.

SENTINEL filter bags comply with the industry standard of a bypass-free filter bag construction. They are available in polypropylene and polyester.

Features and benefits

- Fully-welded construction with patented SENTINEL seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing
- Material is free from silicone and crater-forming substances¹
- Special surface treatment significantly reduces fiber release
- Stable and flexible welded seams that adapt to the restrainer basket

- The handles in the ring make replacing the filter bag quick and easy
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

Filter specifications

Materials

Needle felt polypropylene or polyester

Seal rings

Welded polypropylene or polyester SENTINEL seal ring

Retention ratings

1, 5, 10, 25, 50, 100, 200 μm

Dimensions/Parameters

Sizes

01: \varnothing 7 x 17" L (180 x 430 mm)
02: \varnothing 7 x 32" L (180 x 810 mm)
03: \varnothing 4 x 9" L (100 x 230 mm)
04: \varnothing 4 x 15" L (100 x 380 mm)

Filter area

01: 2.6 ft² (0.24 m²)
02: 5.2 ft² (0.48 m²)
03: 0.9 ft² (0.08 m²)
04: 1.7 ft² (0.16 m²)

Max. operating temperatures

Polypropylene: 194 °F (90 °C)
Polyester: 302 °F (150 °C)

Max. differential pressure

36.2 psi (2.5 bar)

Recommended change-out pressure for disposal²

11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates³

01: 88 GPM (20 m³/h)
02: 176 GPM (40 m³/h)
03: 26 GPM (6 m³/h)
04: 53 GPM (12 m³/h)




Powering Business Worldwide

SENTINEL Filter Bag Range

Retention ratings

Materials	Codes	Retention ratings (µm)							Welded SENTINEL seal rings	Max. operating temperatures °F (°C)	Sizes			
		1	5	10	25	50	100	200			01	02	03	04
Polypropylene	PO	■	■	■	■	■	■	■	E	194 (90)	■	■	■	■
Polyester	PE	■	■	■	■	■	■	■	H	302 (150)	■	■	■	■

Ordering information

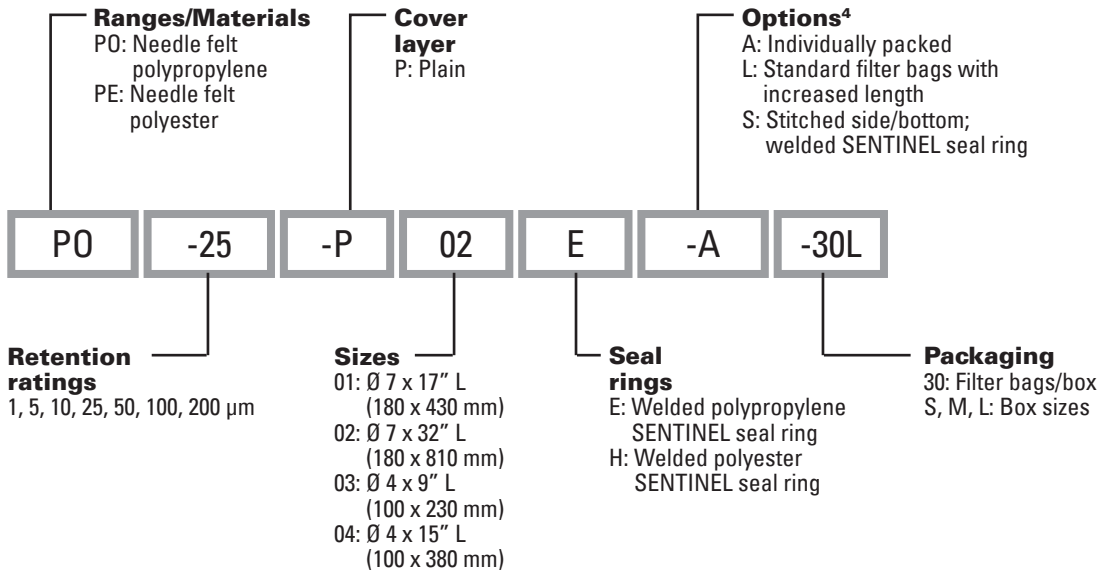

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² Depending on the respective application requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

⁴ Further options upon request (see document SAL-L-12).

North America

44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East

Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Intermornen Product Line

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

Begerow Product Line

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China

No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore

4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil

Av. Julia Gaioli, 474 – Bonsucesso
07251-500 – Guarulhos, Brazil
Tel: +55 11 2465-8822

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2014 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-FTB-08
08-2014