

PRODUCT FEATURES



LAMPING

Two die-cast metal arms add a nice contrast. A glass diffuser provides a glare free wash of light. Includes two 60 watt or equivalent BT15 medium base lamps or two two 26 watt G24Q-3 base quad compact fluorescent lamps (electronic ballast included). Incandescent version dimmable with standard incandescent dimmer.

White Fabric



Black Fabric

Metal

White Fabric

ORDERING INFORMATION

700FMBXT	COLOR	FINISH	LAMP
	FW WHITE FABRIC	S SATIN NICKEL	INCANDESCENT 120V

700FMBXT _____

JOB NAME _____


NOTES _____



BAXTER CEILING

SPECIFICATIONS

HARDWARE MATERIAL	
SHADE MATERIAL	
NET WEIGHT	1.68 lbs
HEIGHT	4in
WIDTH	14.5in
LENGTH	
UP LIGHT / DOWN LIGHT / BOTH?	
WET LISTED	
DAMP LISTED	
DRY LISTED	
WALL / CEILING MOUNT	
SLOPED CEILING ADAPTABLE?	No
GENERAL LISTING	ETL Listed
INCLUDES	

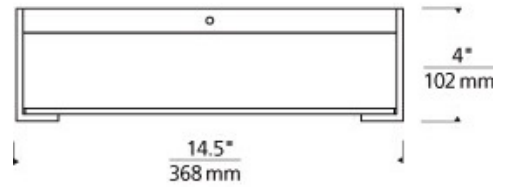

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS			60	
MAX WATTAGE PER BULB				
INPUT VOLTAGE			120V	
DIMMING TYPE*				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?			Y	
WARRANTY**				

*Dimming information available at www.techlighting.com/Downloads#dimming
 ** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6.			
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

