



Best H Flow Control Ltd
www.topflowcontrol.com


MINI BALL VALVE FF

Suite 140,700 Third Line, Oakville, ON L6L 4B1, Canada



FEATURES:

- o 1000PSI/PN63
- o Reduce Port
- o Investment Casting
- o Blow-out Proof Stem
- o Sanitary Design
- o PED97/23/EC Approved
- o Casting Approved AD2000-W0
- o Thread:ASME B1.20.1,BA21,DIN2999/259
- o ISO228-1,JIS B 0203,ISO7/1
- o Inspection Testing:API598,EN12266

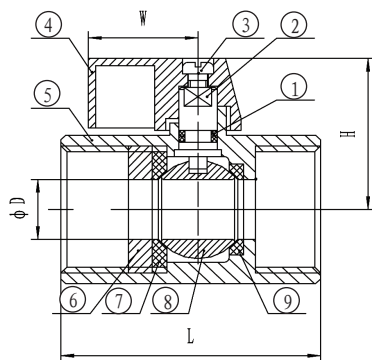

ITEM	DESIGNATION	MATERIAL
1	O-RING	VITON
2	STEM	304
3	BOLT	304
4	LEVER	ALUMIUM ALLOY
5	BODY	CF8M
6	CAP	316
7	BALL SEAT(A)	RPTFE
8	BALL	CF8M
9	BALL SEAT(B)	RPTFE

SIZE	1/4"	3/8"	1/2"	3/4"	1"
D	7	7	9.2	12.5	15
H	26.5	26.5	28.3	31.5	34
W	22.8	22.8	22.8	22.8	22.8
L	40	42	46	54	64.5

+ 1-289-351-0977

TopFlowControl@gmail.com

BEST H FLOW
CONTROL LTD