


Screw Ring Gauges UNC

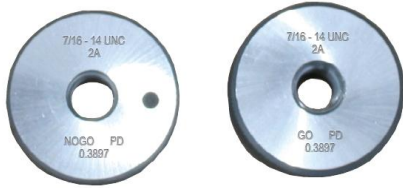

Screw Ring Gauges:

ISO Threads
 6g Tolerance
 Knurled outer surface
 GO: Thick body
 NO-GO Thin body +Surface hole

CODE NO.	SIZE	CLASS	TYPE	PITCH DIA.
53-852-012	4 - 40 UNC	2A	GO PD	0.0950
53-853-012	4 - 40 UNC	2A	NO GO PD	0.0925
53-852-013	1/4 - 20 UNC	2A	GO PD	0.2164
53-853-013	1/4 - 20 UNC	2A	NO GO PD	0.2127
53-852-014	5/16 - 18 UNC	2A	GO PD	0.2752
53-853-014	5/16 - 18 UNC	2A	NO GO PD	0.2712
53-852-015	3/8 - 16 UNC	2A	GO PD	0.3331
53-853-015	3/8 - 16 UNC	2A	NO GO PD	0.3287
53-852-016	7/16 - 14 UNC	2A	GO PD	0.3897
53-853-016	7/16 - 14 UNC	2A	NO GO PD	0.3850
53-852-017	1/2 - 13 UNC	2A	GO PD	0.4485
53-853-017	1/2 - 13 UNC	2A	NO GO PD	0.4435
53-852-018	9/16 - 12 UNC	2A	GO PD	0.5068
53-853-018	9/16 - 12 UNC	2A	NO GO PD	0.5016
53-852-019	5/8 - 11 UNC	2A	GO PD	0.5644
53-853-019	5/8 - 11 UNC	2A	NO GO PD	0.5589
53-852-020	3/4 - 10 UNC	2A	GO PD	0.6832
53-853-020	3/4 - 10 UNC	2A	NO GO PD	0.6773