Product: Noga Cobra Cutting Fluid Applicator

Page 1 of 3



COBRA

The COBRA drop ejector is designed to accurately shoot small quantities of liquid to distinct targets. An air actuated piston shoots the drops through a flexible hose onto the traget.

The drop shots can be automatically timed or manually determined by the user, the amount of liquid in each shot can also be adjusted by a tuning screw at the back of the COBRA all according to the user's needs. The COBRA is operated by clean air, pressure 3-9 bar. Most liquids and solvents up to 250 cst viscosity can be applied.

OPERATING INSTRUCTIONS


The fluid can supplied either by fitting the bowl (CB0146) directly onto the unit, or by using the large container (CB0147) and connecting it to the unit by 4 mm hose. Set up the pneumatic circuit as shown in one of the drawings (a) or (b) or (c). All connections are to be made with 4 mm hose.

Open drop size control nut "S" to maximum drop size. Start pulsing the unit by pressing the actuating valve many times, or operate the automatic pulse generator, until drops emerge.


Adjust the drop size to your needs.

If you have set up the circuit according to drawing (b) or (c), adjust the air flow with the nozzle nut "T".


 Setup for single drops using mechanical valve or automatic pulse generator



b. Setup for finely dispersed droplets




c. Setup to supply drops and air jet independently



COBRA s	pare parts	Order no.
() (Came	Banjo screw + washer	MC0232
	Banjo fitting	MC0031
SE	Nozzle nut	MC0001
	Washer	MC0030

Product: Noga Cobra Cutting Fluid Applicator

Page 2 of 3

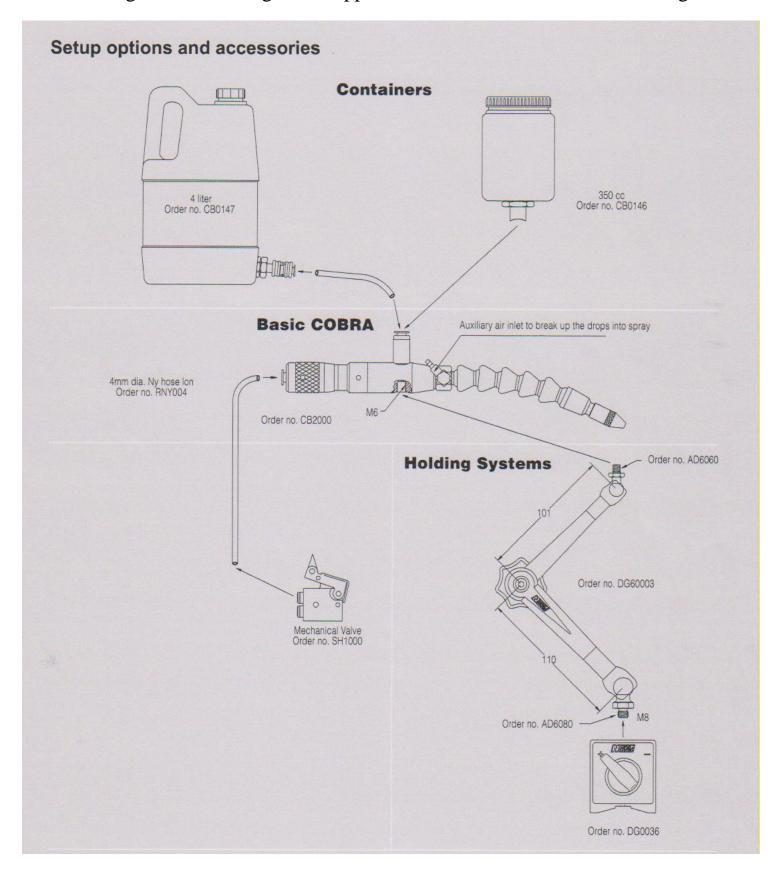

Copyright: Linear Tools 2011

Data Sheet: LDS 1324

Product: Noga Cobra Cutting Fluid Applicator

Page 3 of 3

Date: 01-04-2011

Packed Weight and Dimensions;

Code	Description	Weight g	W mm	H mm	L mm
CB-2100	Cobra Complete Unit	1370	140	70	360
CB-0146	Plastic Fluid Hopper: 350cc	70	80	130	80
CB-2000	Basic Cobra	240	30	30	250
SH-3000	Auto Pulse Generator	310	80	40	80
SH-1010	Actuating Valve	110	100	100	160
SH-2000	Pressure Regulator	295	80	20	100
DG-1100	Arm: M6 & M8 threads	265	70	50	200
MB-C	Magnetic Base: 80kg	1000	55	60	85

Copyright: Linear Tools 2011