


ALTMAN

Catalog number:
701


40 Watts

Fluorescent Blacklight

Specifications may vary from time of printing.

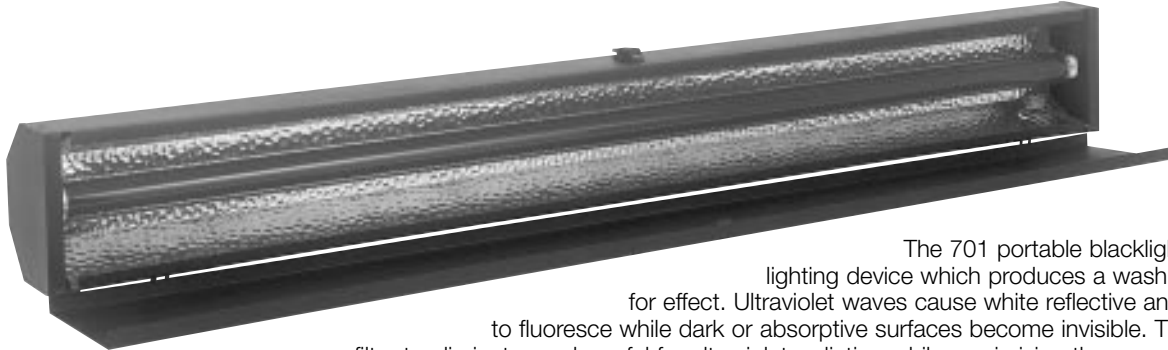

The 701 portable blacklight is a four foot fluorescent lighting device which produces a wash of near ultraviolet radiation for effect. Ultraviolet waves cause white reflective and specially treated surfaces to fluoresce while dark or absorptive surfaces become invisible. The lamp contains an integral filter to eliminate any harmful far ultraviolet radiation while maximizing the near ultraviolet effect. Effective distance for the 701 is 4 to 10 feet from the subject. Common usage is to line the stage front with a number of luminaires to act as ultraviolet footlights. The 701 is constructed of 18 gauge steel with integral ballast, reflector, line cord, and hinged latching cover with carrying handle. The finish is baked black enamel.

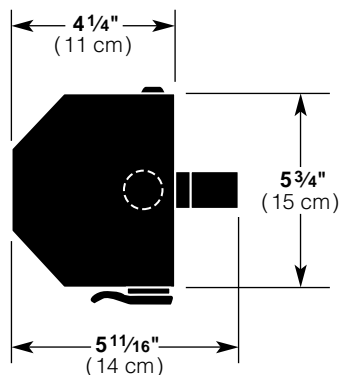

Hanging Weight:
Approx. 15 lbs. (6.8 kg)

Features

- Latching hinged cover is removable
- Integral carrying handle on cover
- 6' power cord with connector
- Quiet operation
- 4' to 10' operating distance for maximum effect
- 40 watt lamp with integral UV filter provided
- 20,000 hour lamp life
- U.L. and c.U.L. listed for 40 watts

Specifications

HOUSING: Cast aluminum and 18 gauge sheet steel construction.

COVER: Removable hinged cover is provided with latch and carrying handle.

MATERIALS: Construction employs all corrosion-resistant materials and hardware.

RATING: 120 volts AC operation, 0.65 amps, 60Hz.

BALLAST: Class P magnetic with automatic resetting thermal protector.

LAMP: 40 Watt F40B/LB.

SOCKETS: Double contact fluorescent lamp holder, two provided. Toolless relamping.

CABLE: 6' 18/3 SVT with male edison plug.

REFLECTOR: Specular aluminum.

FINISH: Baked black enamel, electrostatic application.


WEIGHT: Approx. 15 lbs.

Altman Stage Lighting Company, Inc.
57 Alexander Street, Yonkers, NY 10701

914-476-7987

212-569-7777

FAX: 914-963-7304

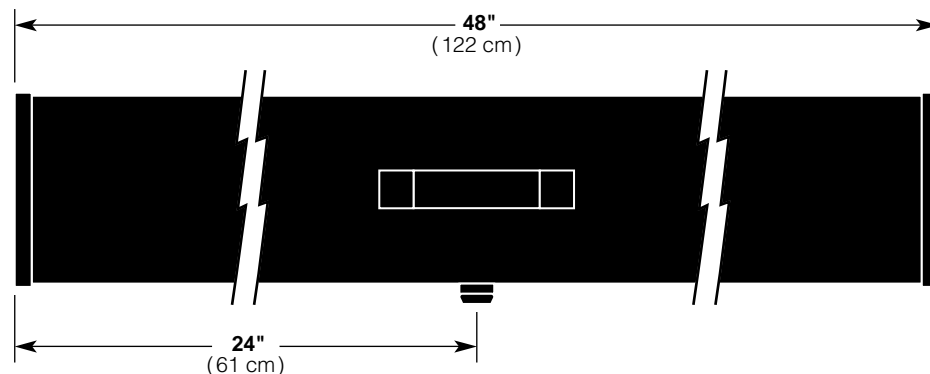

ALTMAN

T H E Q U A L I T Y O F L I G H T