

ENHANCE YOUR SPACE – DIVIDE & PROSPER


- Features a contemporary European design that easily assembles and is relocatable
- Adaptable to ongoing organizational changes—it installs over existing flooring and can be easily moved or reconfigured
- Adapts to any manner of need: executive, open-plan offices, meeting rooms or phone booth-style kiosks to accommodate private conversations











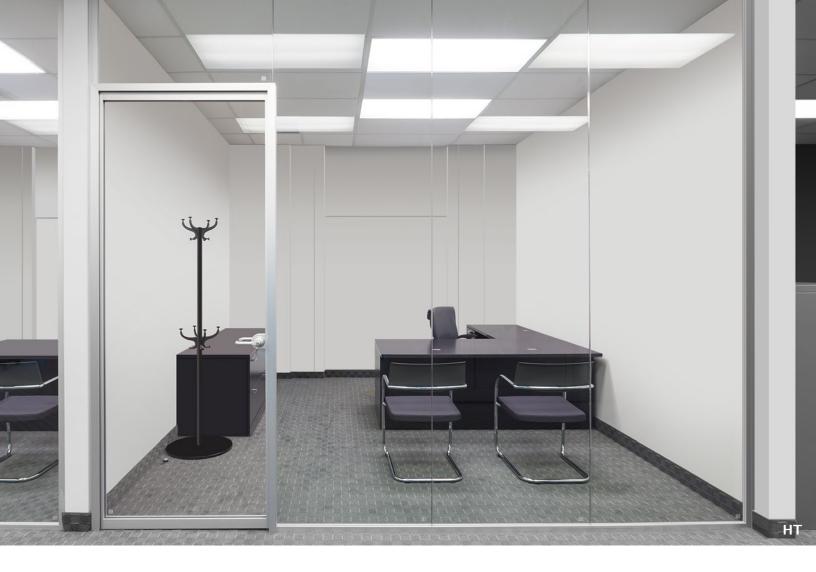

mywall

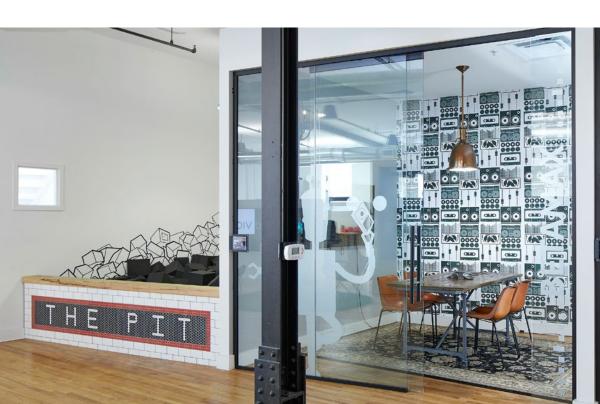

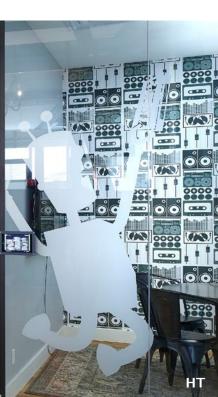







Specifications

Description: mywall® is a new fully demountable and easily relocatable glass partition wall system featuring anodized or powder coated aluminium extrusions.

Technical	H5T Clear	H5 Frame	H5 Solid	HT Clear
Wall Thickness	2.4"	2.4"	2.4" - 4"	1.6"
Base Adjustment	1"	1"	1"	1"
Side Adjustment	1"	1"	1"	1"
Standard Height up to	10'	10'	10'	10'

Base Floor Profiles				
Slim Profile + Squared strip	2" (h)	2" (h)	2" (h)	N/A
Ultra Line Profile	N/A	N/A	N/A	1.25"
Basic Profile	2"	2"	2"	N/A
Basic Profile + Squared strip	3.2"	3.2"	3.2"	N/A

Inserts				
Glass	10 mm	8 mm	N/A	10
Melamine	N/A	N/A	1/2"-5/8ths	N/A
Drywall	N/A	N/A	1/2"-5/8ths	N/A
Wood	N/A	N/A	1/2"-5/8ths	N/A

Demising Wall	Interior Detail
Level 1 Sound Guard	2.4" wide with ½" melamine board X 2 with Roxul sound insulation
Level 2 Sound Guard	3' wide with 5/8ths melamine board X 2 with Roxul sound Insulation
Level 3 Sound Guard	3" wide with ½" melamine board bonded to 1/8th hardwood with Green Glue, (sound deadening) X 2 + Roxul insulation + Privacy Board & Sound Silencer in plenum

Doors	
Swing/Pivot	
Glass	Frameless glass doors in standard sizes
Glass	Framed or frameless Tertial door in standard sizes (Clear Ultra Line)
Melamine	Available in various finishes and dimensions
Wood Vaneer	Available in various finishes and dimensions
Sliding	
Glass	Frameless glass doors available in 42" or 48"

Hardware	Finish	Hardware Detail
Ladder Handle Pull	Brushed or polished stainless steel	Sizes range from 18" to 84"
Pivot Handle	Brushed or polished stainless steel	
Pivot Hinges	Brushed stainless steel	Modern Design -Stainless Steel
Door Stopper	Brushed or polished stainless steel	Features center rubber gasket
Sliding Door Glide	Brushed stainless steel	Adjusts 8-12mm (glass thickness)















• mywall® offers multiple design options—typically, at a less cost-per-linear-foot than similar systems.



Frame: Full-height glass panels encased in vertical aluminum extrusions



Solid



Clear: Full-height glass-to-glass panels with polycarbonate connectors





(905) 331 8244 www.mywall.ca